

UNCLASSIFIED

AD 419204

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

CATALOGED BY DDC
AS AD NO. _____

419204

41 9204

TECHNICAL NOTE NO. 20

IMPEDANCE DATA ON OBLIQUE INCIDENCE ANTENNA
LOCATED AT LUBBOCK, TEXAS

by

Fred R. Ore

September 1963

Contract Nonr 1834(02)
ONR Project No. N 371-161

Supported by
OFFICE OF NAVAL RESEARCH

Radiolocation Research Laboratory
Report No. R.R.L.-212
Department of Electrical Engineering
Engineering Experiment Station
University of Illinois
Urbana, Illinois

CONTENTS

	Page
1. Introduction	1
2. Description of the Antenna	1
3. Impedance Measurements of the Full Scale Antenna	2
4. Single Element Model Pattern Measurements	2
5. Two Element Array, Model Pattern Measurements	3

ILLUSTRATIONS

Figure No.		Page
1	Sketch of an element of Granger Associates 726-2.5/32-2A log periodic two element array showing the design parameters	6
2	Block diagram of the impedance measuring setup	7
3	Loss in DB per 100 feet of RG 17/U cable as a function of frequency in megacycles	8
4	A graph used to correct measured VSWR for cable losses	9
5		10
6		11
7	Single element model	12
8	Measured, single element, azimuthal patterns	13
9	Measured, single element, azimuthal patterns	14
10	Measured, single element, azimuthal patterns	15
11	Measured, single element, azimuthal patterns	16
12	Measured, single element, elevation patterns	17
13	Measured, single element, elevation patterns	18
14	Two element array model	19
15	Measured, two element array, azimuthal patterns	20
16	Measured, two element array, azimuthal patterns	21
17	Measured, two element array, azimuthal patterns	22
18	Measured, two element array, azimuthal patterns	23
19	Measured, two element array, elevation patterns	24

A NOTE ON THE PERFORMANCE OF GRANGER ASSOCIATE'S 726 2.5/32-2A ANTENNA

1. Introduction

This technical note gives the results of a series of performance measurements made by the author on a Granger Associates type 726-2.5/32-2A antenna. This antenna was purchased by the Radiolocation Research Laboratory of the University of Illinois and installed on the campus of the Texas Technological College, Lubbock, Texas. The antenna is to be used in conjunction with ionospheric sounding equipment located at Texas Technological College, and operated under the supervision of the Radiolocation Research Laboratory of the University of Illinois.

Given in this technical note are (1) a brief description of the antenna, (2) the result of impedance measurements made on the full scale structure, and (3) the results of pattern measurements made on scale models of a single element of the array and of the array.

2. Description of the Antenna

This antenna is a frequency-independent array of two log-periodic, triangular tooth, unidirectional elements. The frequency range of the structure is approximately 2.5 to 32 Mc. The design parameters as measured by the author from the full scale model are $\alpha = 30^\circ$, $\tau = .683$, $\xi = 3.5^\circ$ (see Figure 1.) The nine triangular shaped teeth of each element are hung from a fiberglass catenary supported at the back of the element by a 140 foot steel tower and at the front of the element by a 24 foot wooden pole. Since the vertices of the two elements of the array meet at the front of the array, a single wooden pole serves as a common support for both catenaries. The angle between the two elements of the array is 40° . The two elements of the array are fed in parallel to give an H-plane (azimuthal) sum pattern. The teeth of each element are capacitively shunt fed from a form of open wire transmission line common to this type of Granger Associate's antenna.

A ground screen system consisting of #10 copper wire is arranged under each of the elements and extends to approximately 100 feet in front of the array. The junctions of the wire of this ground screen are silver soldered to give a good electrical and mechanical connection.

All the hardware of the structure appears to be weather resistant consisting of aluminum, stainless steel, and galvanized steel.

In general the structure appears to be well built with good engineering practices being used throughout.

3. Impedance Measurements of the Full Scale Antenna

Figure 2 shows the block diagram of the impedance measuring set-up used by the author. The impedance was measured through 346 feet of RG 17/u coaxial cable terminated in the transmitter building located back of the array. This is the actual cable to be used with the antenna under operating conditions.

Table 1 gives the data as recorded from the bridge readings, and that same data corrected for cable losses and cable length. Columns labelled R_o and X_o are respectively the real and imaginary components of the impedance seen looking into the cable from the transmitter building. Columns labelled R_R and X_R are respectively the real and imaginary components of the impedance at the feed point of the antenna, normalized to 50 ohms. Figures 3 and 4 are graphs used to correct the data for cable loss.

Figure 5 is the Smith Chart plot of the normalized feedpoint impedance plotted from columns labelled R_R and X_R of Table 1.

As can be seen from this Smith Chart plot the feedpoint VSWR of the array is 2:1 or less from slightly above 2.5 to 31 Mc. This is approximately the impedance performance claimed by Granger Associates.

Table 2 is the measured impedance data furnished by Granger Associates for this antenna, and Figure 6 is the Smith Chart plot of the Granger data.

Comparing the Granger data plot (Figure 6) with the plot of the data taken by the author, (Figure 5) one sees that the agreement between the two plots is in general reasonably good. The rotational discrepancy at the high frequency end of the band could possibly be explained by a difference in the definition of the actual feed point of the array. For the data taken by the author, the feed point of the array was defined at the dielectric surface of the LC connector on the impedance transformer located at the front of the antenna. The feed point as defined by the Granger representative who measured the antenna impedance is unknown.

4. Single Element Model Pattern Measurements

Using the measured design parameters of the full scale antenna as stated in the antenna description above, that is, $\alpha = 30$, $\tau = .683$ and $\xi = 3.5^0$,

a scaled model was constructed of one of the elements of the array. The scale factor was such that the longest tooth of the model was approximately $\lambda/4$ in length at 475 Mc. (since the longest tooth of the full scale antenna is approximately $\lambda/4$ at 2.7 Mc the approximate scale factor is 175:1). The triangular teeth of the element were made of #20 tinned copper wire and soldered to a brass plate (see Figure 7). A brass rod of the proper length was located at the back of the element as shown to represent the tower of the full scale model. The feed line of the model was made from 75 ohm twin lead transmission lines. This transmission line was fed from a chassis type, BNC coaxial connector through the brass plate as shown. Elevation and azimuthal patterns of the model were measured on a ground screen pattern range.

The resulting H-plane (azimuthal) patterns of this single element are shown in Figures 8, 9, 10 and 11. The E-plane (elevation) patterns are shown in Figures 12 and 13. These patterns were taken over the 450-2070 Mc frequency range.

The average measured azimuthal half-power beamwidth was found to be approximately 118 degrees. The average measured elevation half-powered beam width over perfect ground was approximately 34 degrees.

5. Two Element Array, Model Pattern Measurements

A two element array was constructed using two elements as nearly as possible identical to the single element described in the preceeding section. These two elements were soldered to a brass plate with their vertices at a common point and with an angle of 40 degrees between the planes containing the teeth of the elements, see Figure 14.

Figures 15, 16, 17 and 18 show representative H-plane (aximuthal) patterns of the two element array from 450 to 2070 Mc, and Figure 19 shows the representative E-plane (elevation) patterns over the same frequency range. Again, these patterns were measured on a ground screen pattern range.

The average measured azimuthal half-power beamwidth of the array was approximately 77 degrees. The average measured elevation half-power beamwidth over perfect ground was approximately 32 degrees. The average front-to-back ratio as calculated from the H-plane patterns was approximately 15 db.

Freq (Mc)	λ (ft)	$\frac{525}{\lambda}$	R_o (From Bridge)	X_p 200	$X_o =$ X_p / fMc	Normalized $R_o / 50$	$X_o / 50$	in db Total Cable Loss	Loss R_c	Corrected X_c	Rotated R_R	X_R
1.9	518	1.012	46	200	-58	.92	-1.16	.311	.87	-1.24	1.07	-1.38
2.0	492	1.07	20	200	-17.5	.40	-.35	.325	.36	-.37	.62	-.89
2.1	468.6	1.12	24.9	200	18.65	.50	.373	.337	.45	.39	.42	-.28
2.3	427.9	1.275	71.5	200	-47	1.43	-.94	.35	1.42	-.93	.55	.47
2.5	393.7	1.335	24.5	200	2.4	.49	.048	.37	.46	.05	1.21	.85
2.7	364.5	1.44	74.8	200	21.8	1.5	.436	.381	1.55	.53	1.78	-.21
2.9	339.4	1.548	52	200	-9.32	1.04	-.186	.398	1.05	-.20	1.15	-.125
3.1	317.5	1.653	46	200	1.93	.92	.0386	.411	0.92	.038	0.98	-.09
3.3	298.3	1.76	68	200	-4.54	1.36	-.091	.428	1.37	-.095	.725	.02
3.5	281.2	1.867	38	200	-6.58	.76	-.132	.443	.72	-.140	.82	.26
3.7	266	1.975	59	200	25.1	1.18	.502	.457	1.20	.60	1.44	.53
3.9	252.4	2.08	57	200	-30.8	1.14	-.616	.468	1.12	-.71	1.95	-.10
4.1	240	2.188	32	200	1.95	.64	.039	.478	.60	.04	1.23	-.53
4.5	219	2.40	57	200	-15.1	1.14	-.302	.502	1.15	-.37	.76	-.202
4.9	201	2.61	55	200	4.29	1.10	.086	.530	1.12	.10	.93	.130
5.3	186	2.82	41.5	200	-3.4	.83	-.068	.554	.79	-.095	1.04	.260
5.7	173	3.04	69	200	-16	1.38	-.32	.571	1.45	-.43	1.64	-.07
6.1	161	3.26	44	200	11.6	.88	.232	.592	.86	.26	1.10	-.33
6.5	152	3.45	52	200	-10.8	1.04	-.216	.615	1.04	-.25	.90	-.22
8.0	123	4.26	52	200	-8.75	1.04	-.175	.692	1.04	-.22	.90	.19
10.0	98.5	5.34	58	200	0	1.16	0	.780	1.19	0	.91	-.16
12.0	82.1	6.39	47.5	200	-6.67	.95	-.134	.865	.92	-.175	.82	.02
14.0	70.4	7.46	54	200	-7.21	1.08	-.144	.934	1.10	-.195	1.00	-.20
16.0	61.5	8.54	59	200	-8.13	1.18	-.163	1.01	1.22	-.23	1.34	-.08
18.0	54.7	9.60	48.5	200	-5.0	.97	-.10	1.07	.95	-.15	1.13	-.09
20.0	49.2	10.7	48.5	300	-10.5	.97	-.21	1.13	.95	-.28	1.15	.28
22.0	44.8	11.7	54	200	-8.14	1.08	-.163	1.20	1.10	-.25	1.01	.25
24.0	41.0	12.8	37.5	200	.792	.75	.0158	1.25	.67	.035	1.35	.31
26.0	37.9	13.9	59.0	200	13.5	1.18	.26	1.31	1.28	.40	1.40	-.30
28.0	35.2	14.9	63.0	500	-8.82	1.26	-.176	1.37	1.36	-.275	.86	-.33
30.0	32.8	16.0	35.5	500	-13.9	.71	-.278	1.42	.60	-.35	.60	-.35
31.0	31.8	16.5	32.5	100	.258	.65	.0516	1.45	.52	.07	.52	.07

Physical Length of Cable = 346 ft. or $346 / .659 = 525$ ft. = Electrical Length of Cable
 where 65.9 is V.P.% for RG 17/U

$X_p = X_1 - X_2$ = Reading - initial setting

Loss of Cable = $3.46 \times \text{loss}/100$ ft. db.

Data Taken: 11 Apr 1963

TABLE 1

IMPEDANCE DATA TAKEN ON GRANGER ASSOCIATES MODEL 726-2.5/32-A
LOG PERIODIC ANTENNA LOCATED ON CAMPUS OF TEXAS TECH, LUBBOCK, TEXAS

5

Freq. (Mc)	R	Xf	R _k	R _k /50	X/50	Rotated R _k /50	X/50
2	25	-75	25	.5	-.75	.57	-.85
2.5	94	70	94	1.88	.56	1.63	.65
3	43	-31	43	.86	-.21	.89	-.24
4	54	-141	54	1.08	-.71	1.30	-.71
5	49	52	49	.98	.21	.94	.20
6	53	-142	53.1	1.06	-.47	1.23	-.45
7	44	-15	44.2	.88	-.04	.91	-.10
8	61	45	61.3	1.23	.11	1.15	.21
9	45	-110	45.5	.91	-.24	1.05	-.27
10	49	-50	49.5	.99	-.10	.99	-.01
11	43	-1	43.1	.86	0	.88	-.075
12	58	39	58.8	1.18	.07	1.08	.185
13	49	-120	50.0	1.0	-.18	1.14	-.125
14	48	-25	50.0	1.0	-.04	1.03	-.04
15	50	-148	51.3	1.03	-.20	1.19	-.09
16	40	-105	41.2	.82	-.13	.99	-.24
17	43	40	44.5	.89	.05	.90	-.07
18	49	-25	50.9	1.02	-.026	1.28	-.08
19	43	-30	44.9	.90	-.03	.99	-.10
20	47	90	49.4	.99	.09	.92	.03
21	56	-50	59.1	1.18	-.05	1.08	.185
22	48	-280	50.9	1.02	-.25	1.30	.01
23	37	-188	39.9	.79	-.16	1.15	-.27
24	34	20	36.4	.73	.02	.915	-.29
25	37	153	39.8	.80	.12	.85	-.175
26	43	290	46.4	.93	.21	.80	-.045
27	45	290	48.8	.98	.20	.82	-.02
28	48	310	52.2	1.05	.22	.80	.04
29	54	480	59.4	1.19	.30	.74	.11
30	74	100	82.0	1.64	.67	.55	.26

REMARK

This is a copy of the impedance data taken on Granger Associates Model 726-2.5/32-2A Log Periodic Antenna by a representative of Granger Associates dated 31 Jan 1963. See Smith Chart Plot of Rotated Impedance (Figure 6).

Apparently this impedance was measured through a short length of cable (estimated length given below). This cable length was estimated from data and Smith Chart Plot supplied by Granger Associates.

Pts. rotated through ≈ 4.981 ft (Electrical Length)

TABLE 2

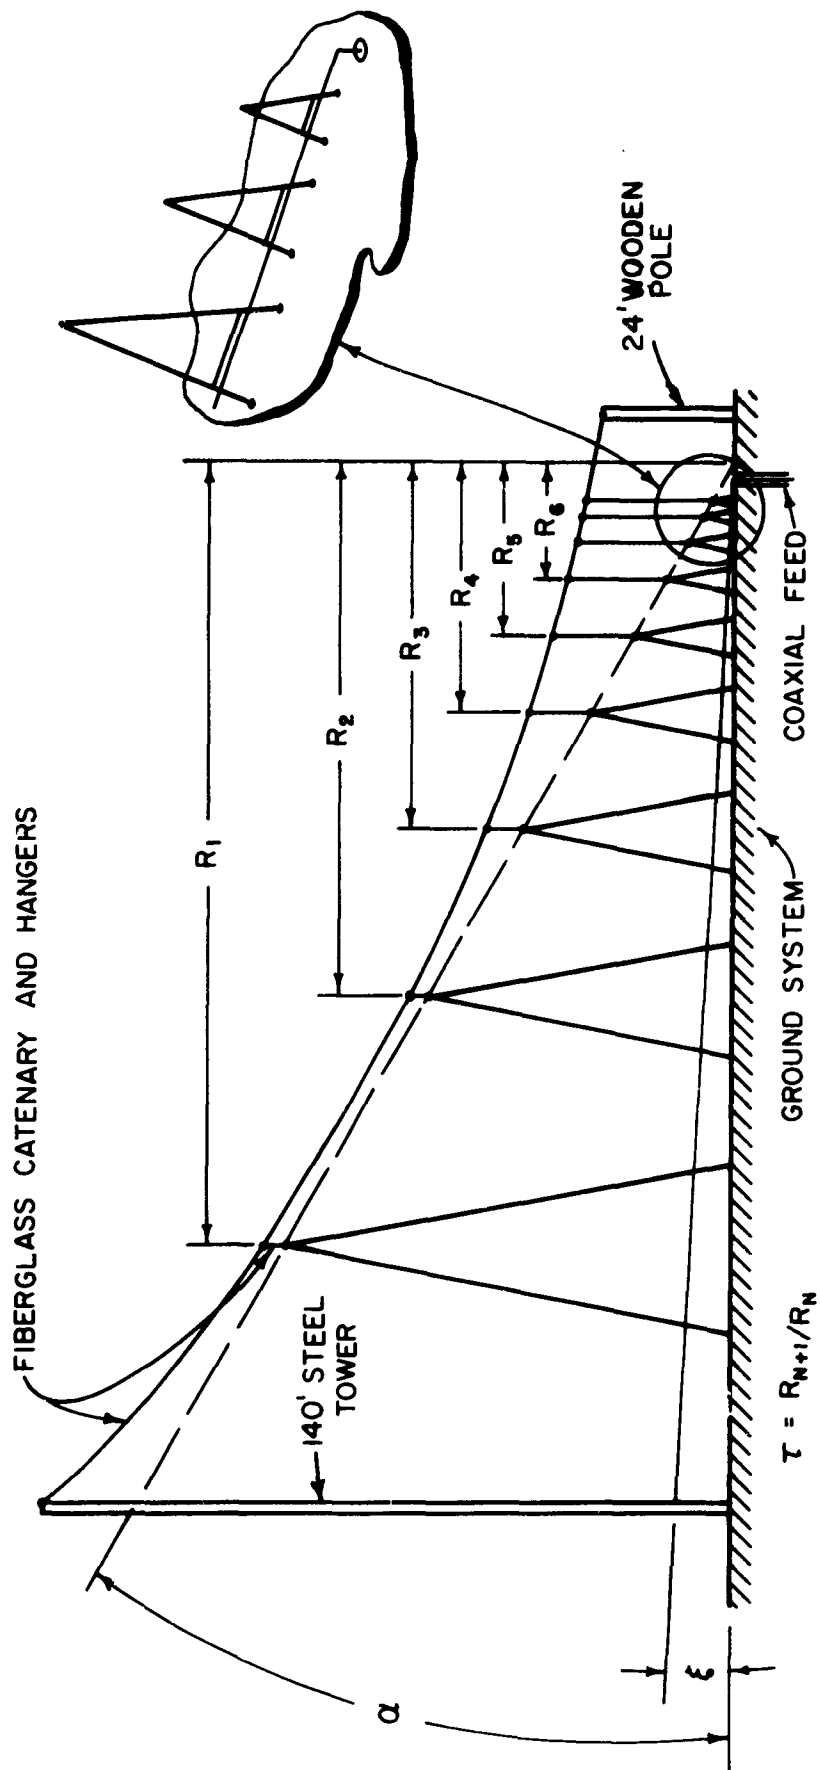


Figure 1. Sketch of an element of Granger Associates 726-2.5/32-2A log periodic two element array showing the design parameters

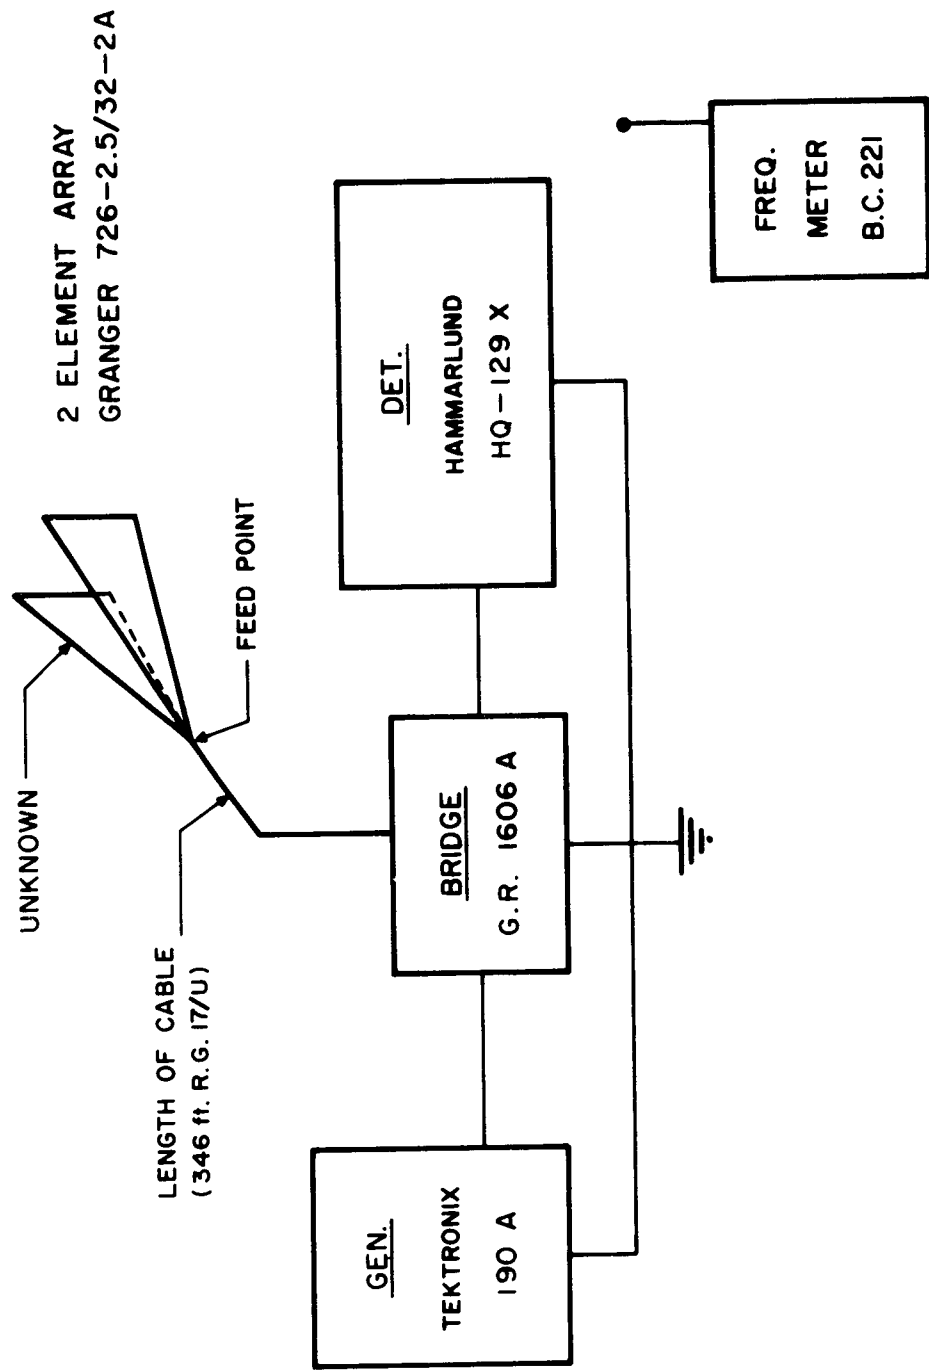


Figure 2. Block diagram of the impedance measuring setup

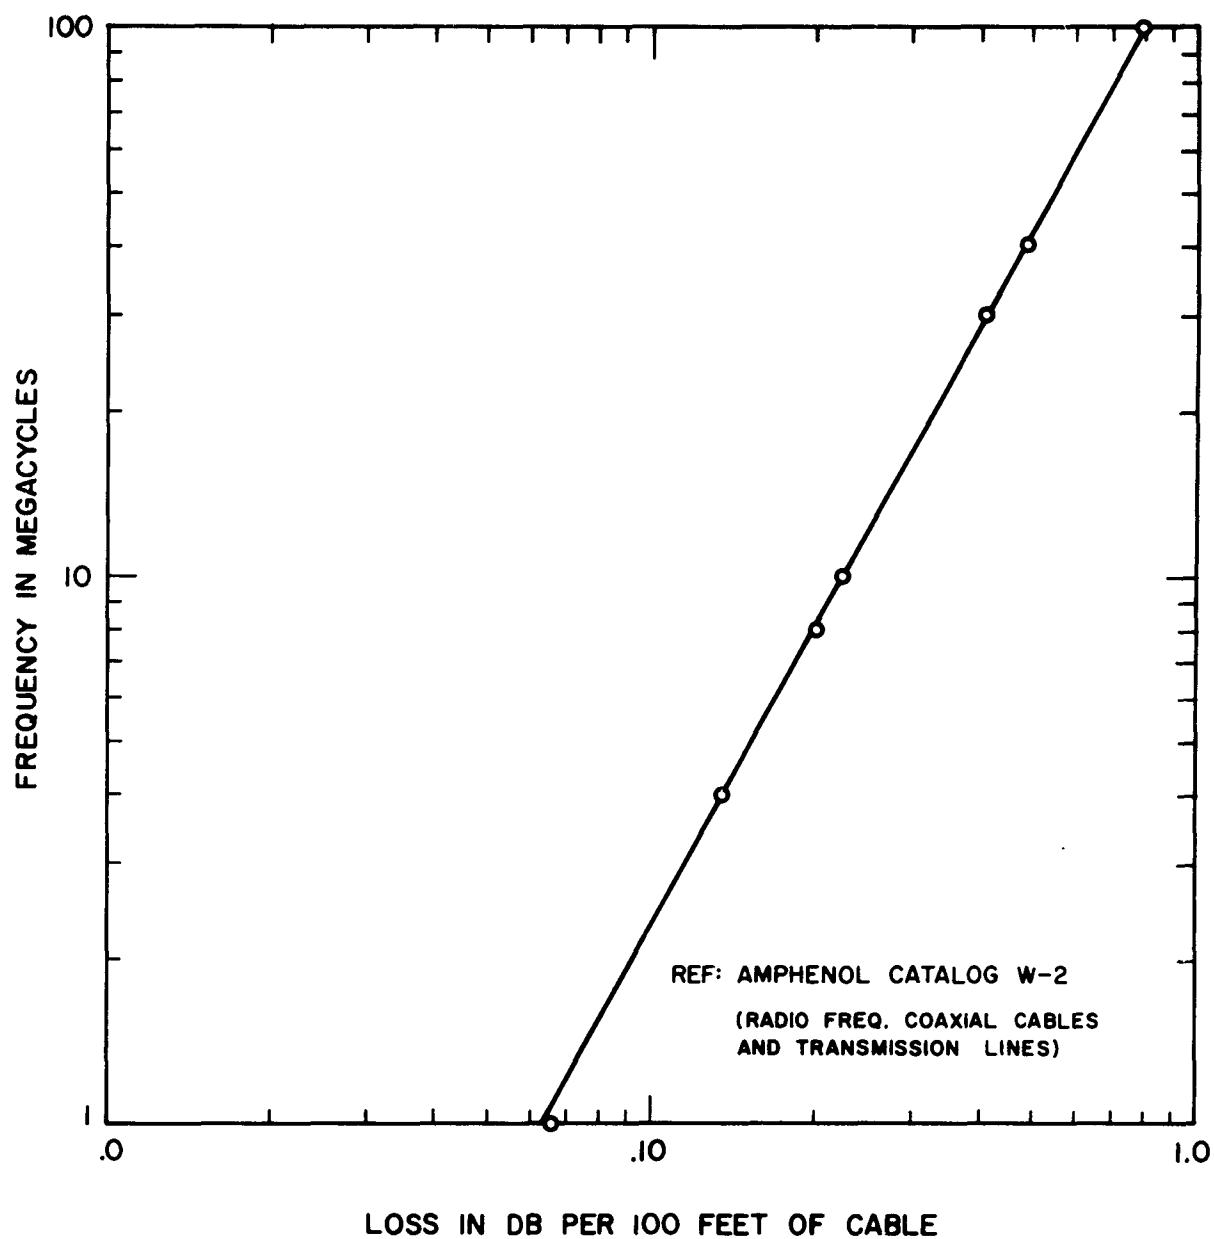


Figure 3. Loss in DB per 100 feet of RG 17/U cable as a function of frequency in megacycles

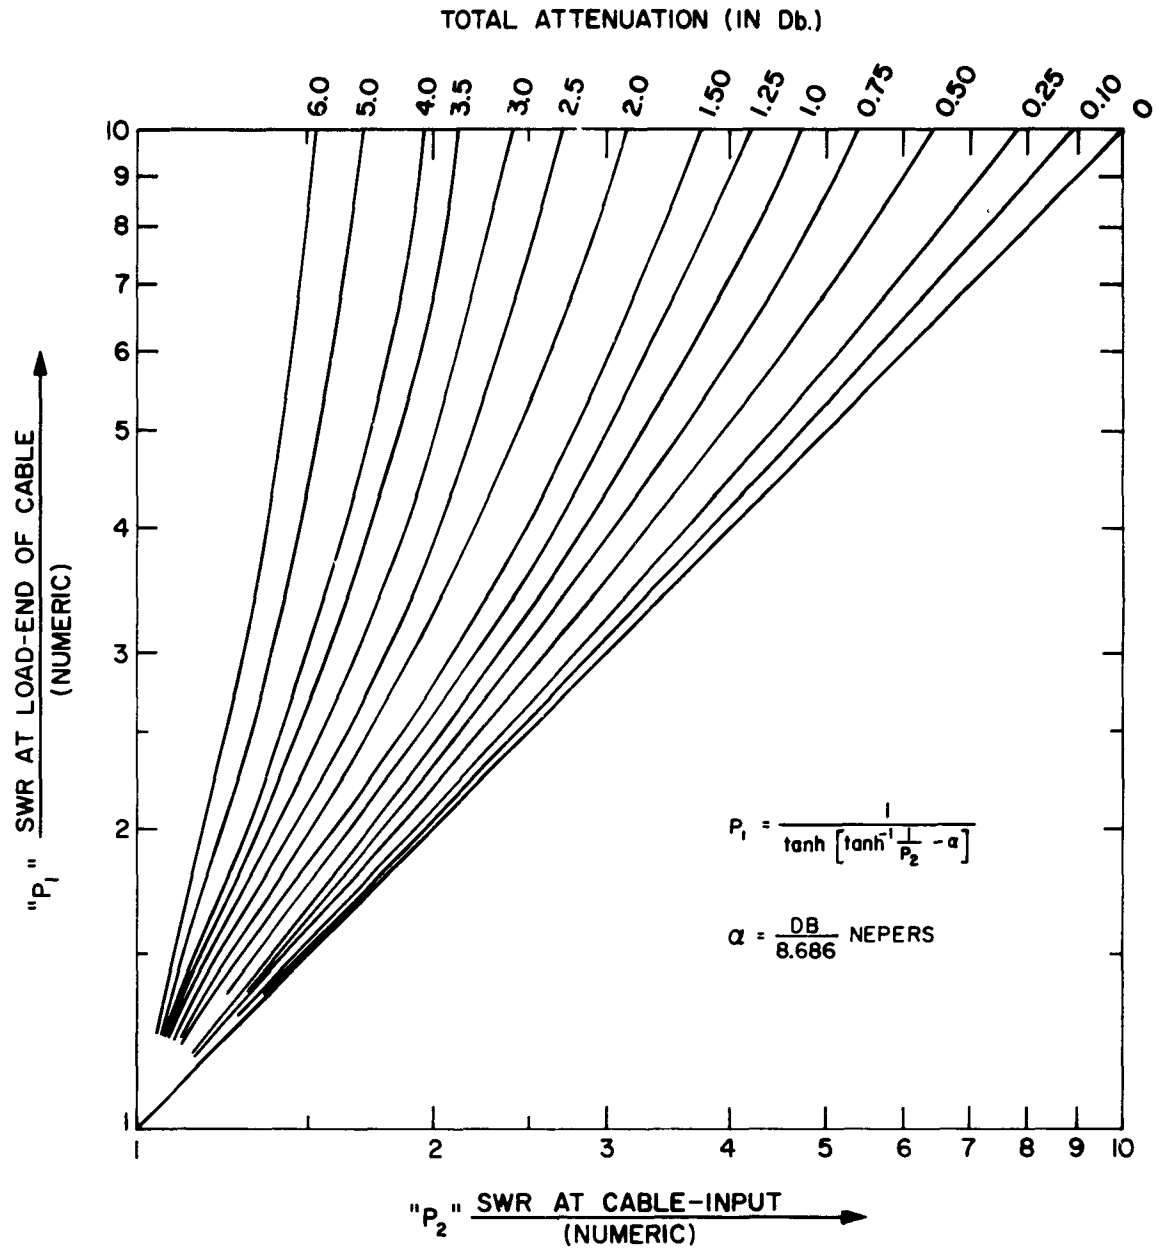


Figure 4. A graph used to correct measured VSWR for cable losses

NAME	F.R. ORE	TITLE	G.A. 726-2.5/32-A	DWG. NO.	
SMITH CHART FORM 5301-7560-N		GENERAL RADIO COMPANY, WEST CONCORD, MASSACHUSETTS		DATE	4-11-63.

IMPEDANCE OR ADMITTANCE COORDINATES

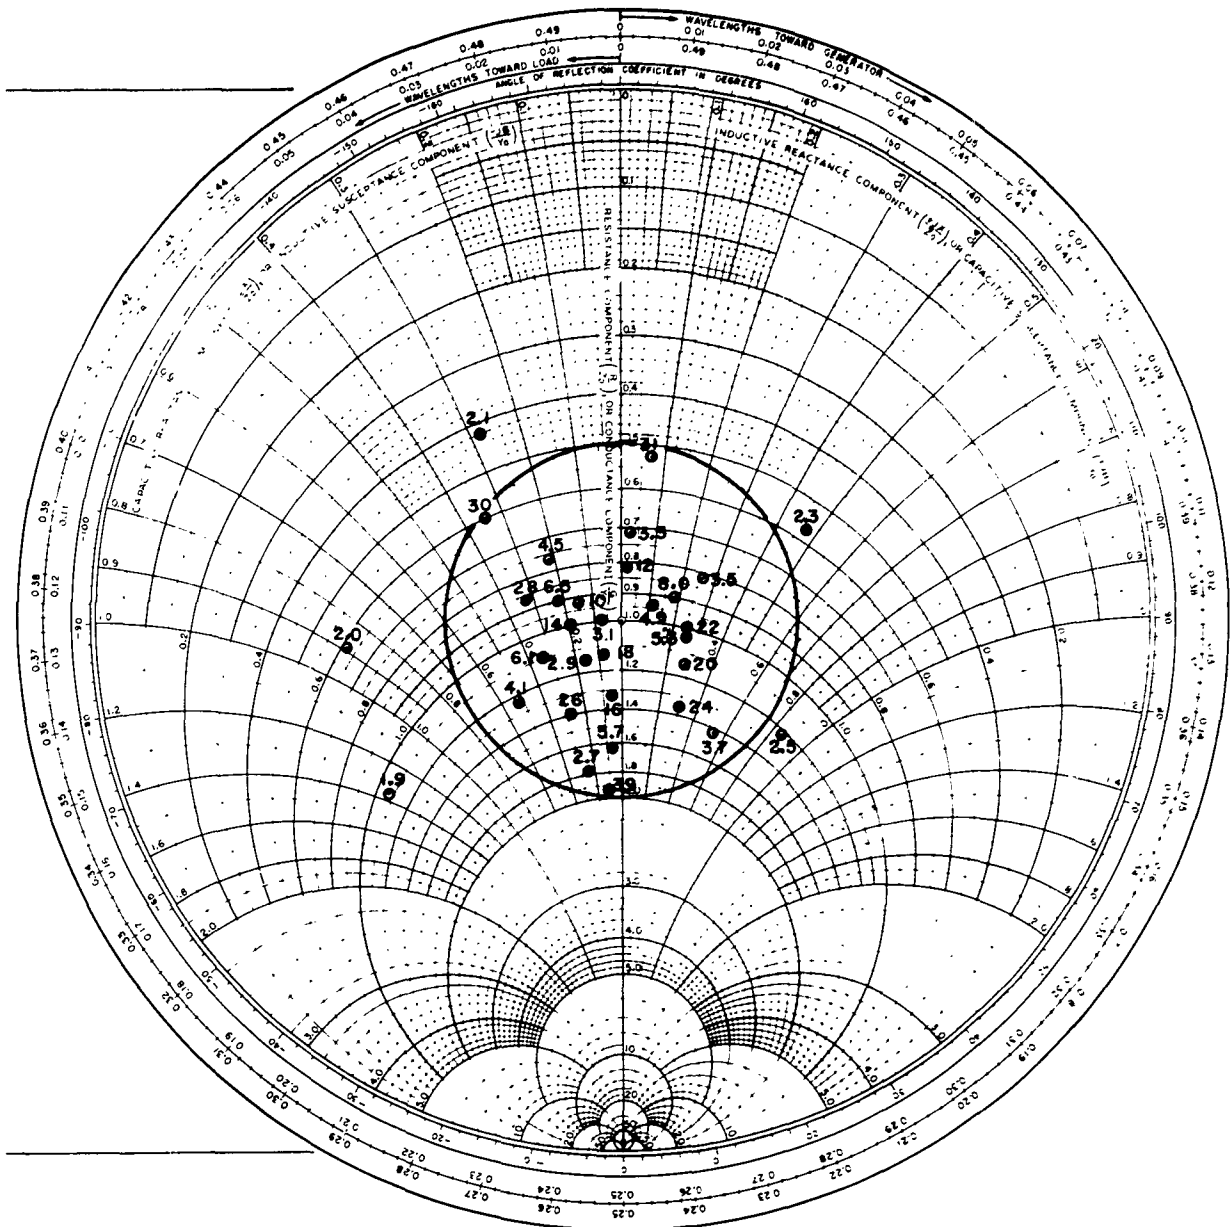


Figure 5

NAME	HOCHMAN	TITLE	G.A. 726-2.5/32-A	DWG. NO.	
SMITH CHART Form 5301-7560-N	GENERAL RADIO COMPANY, WEST CONCORD, MASSACHUSETTS			DATE	1-31-63.

IMPEDANCE OR ADMITTANCE COORDINATES

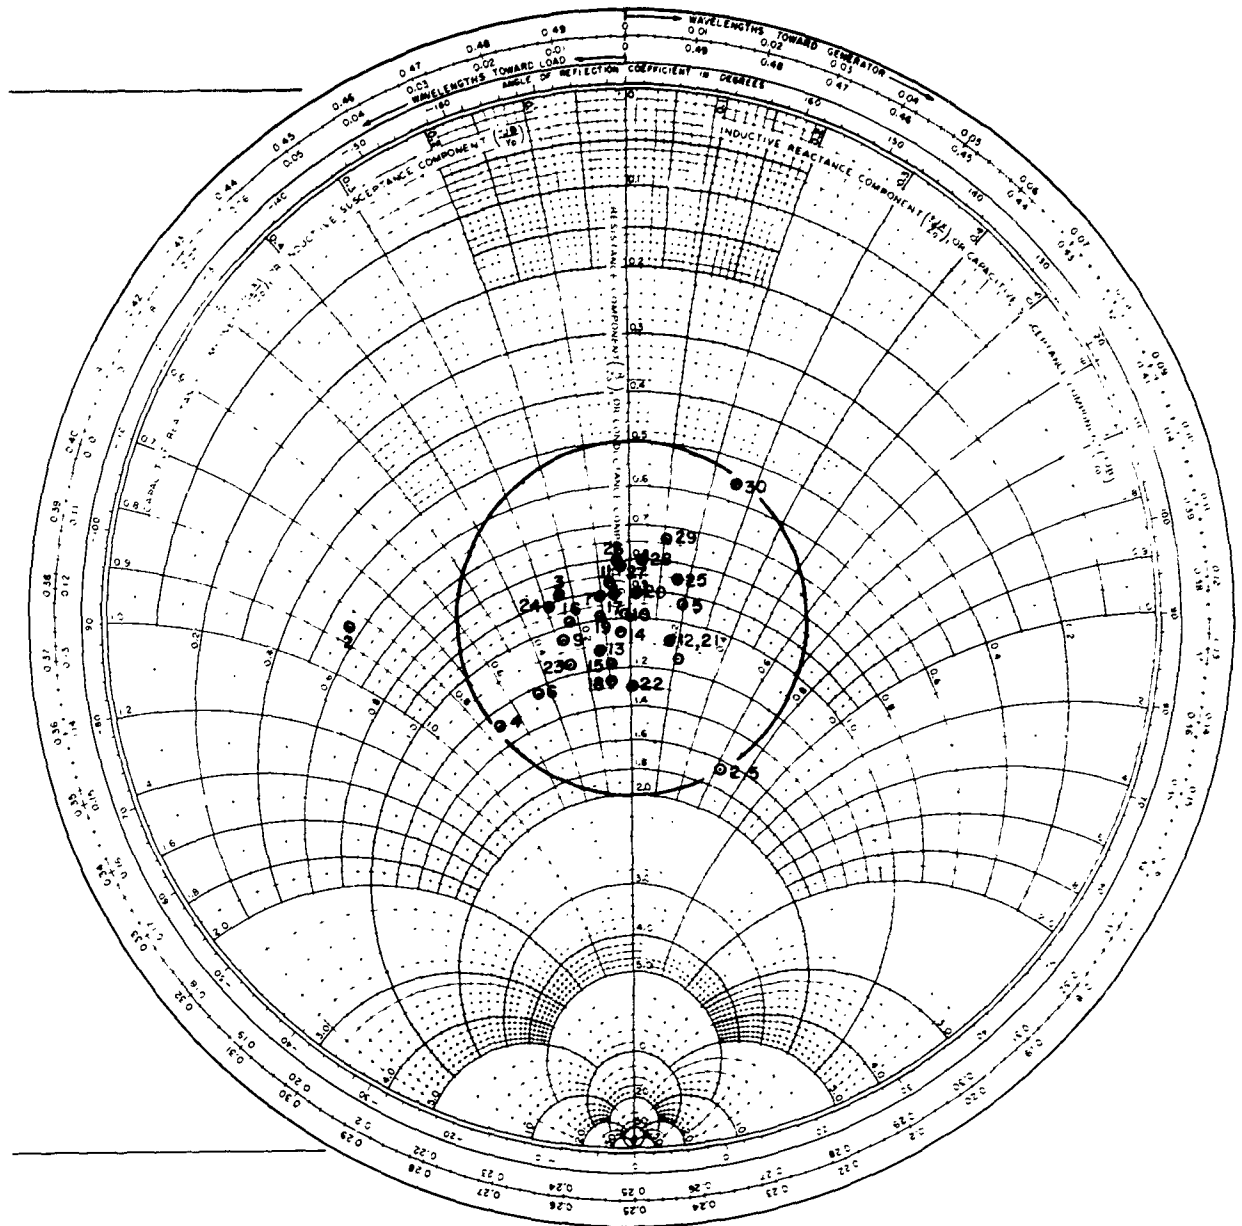


Figure 6

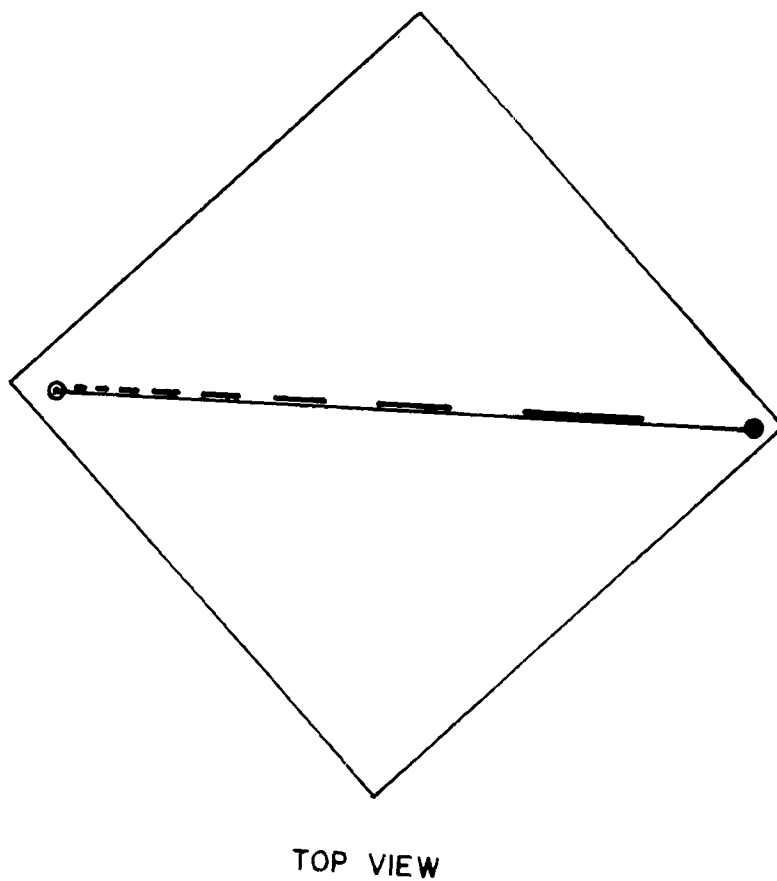
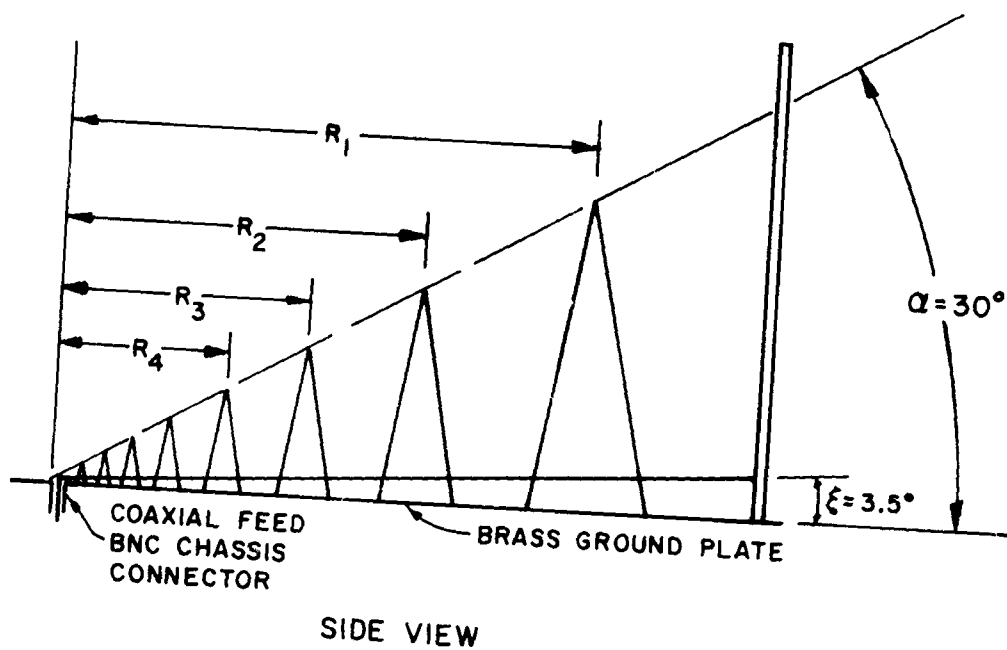


Figure 7. Single element model

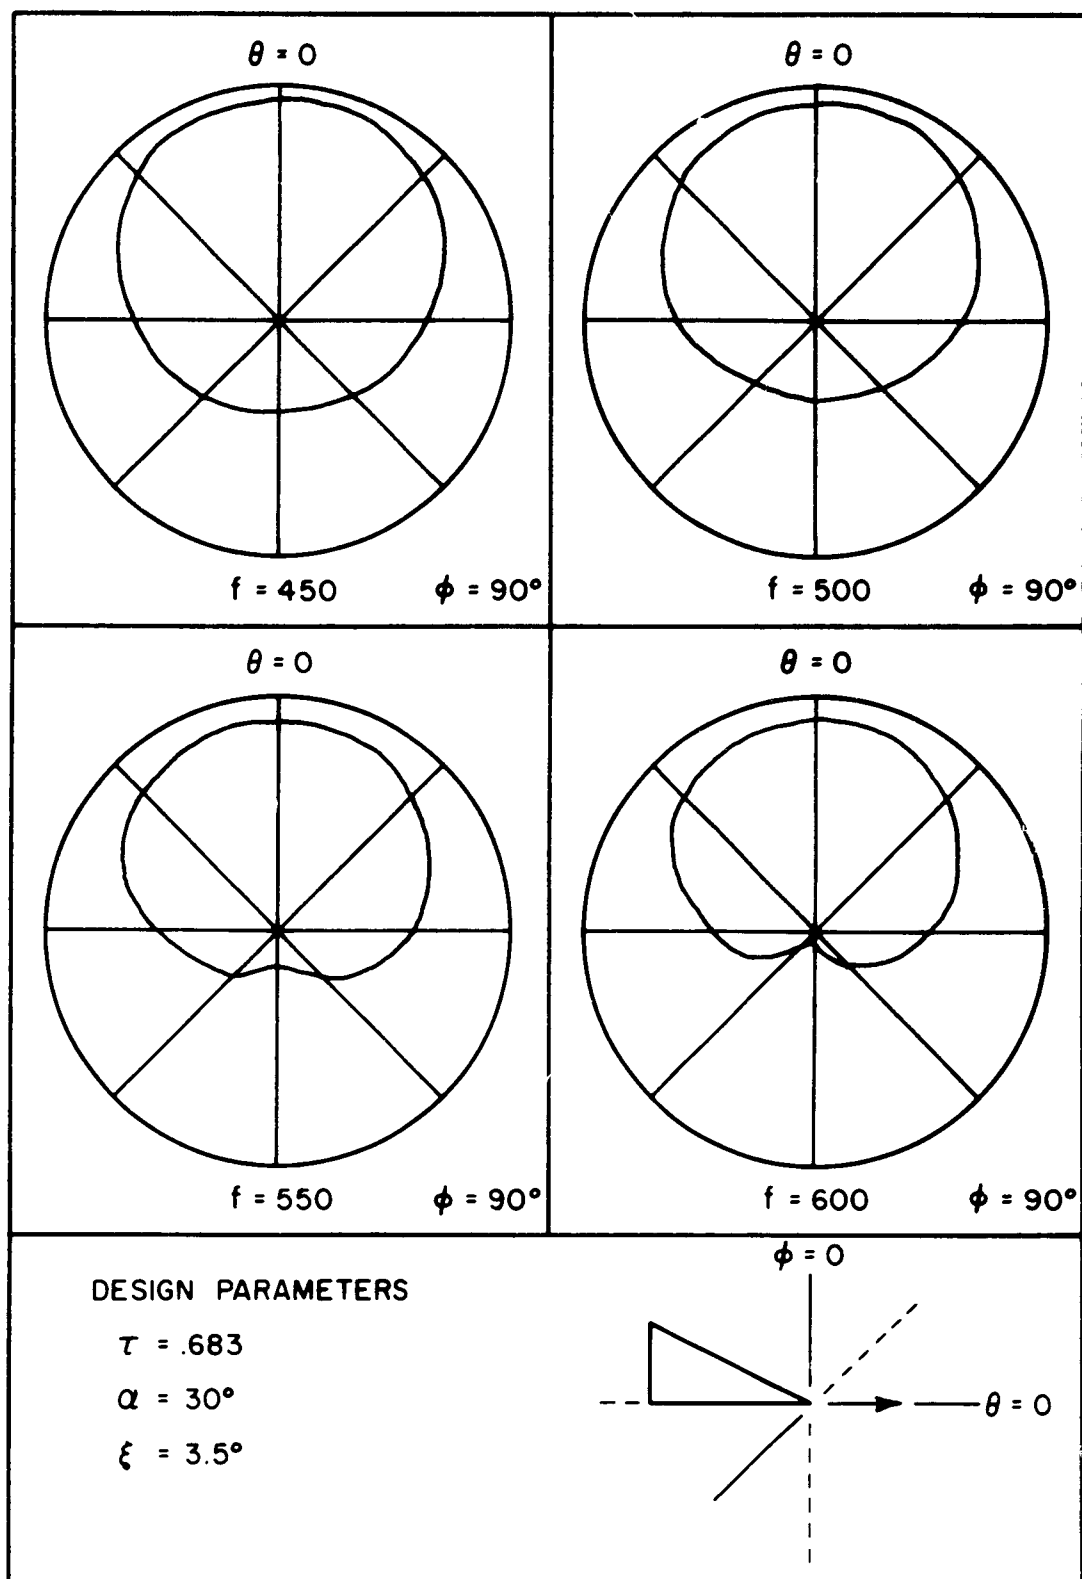


Figure 8. Measured, single element, azimuthal patterns

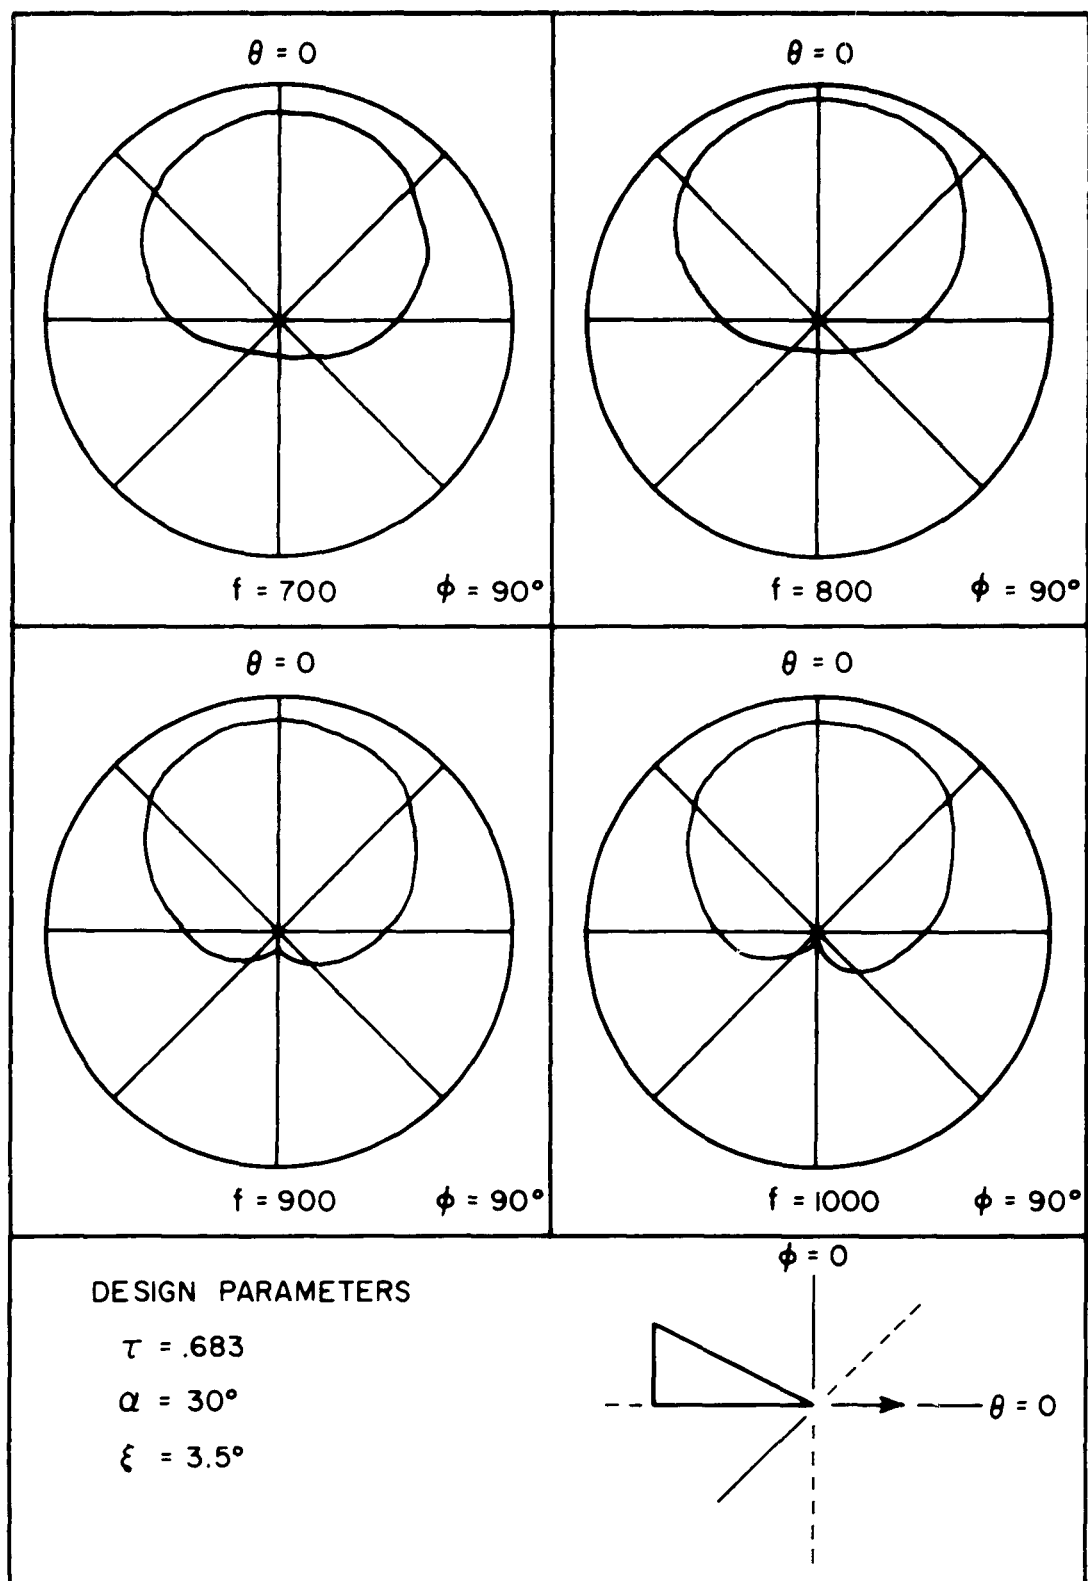


Figure 9. Measured, single element, azimuthal patterns

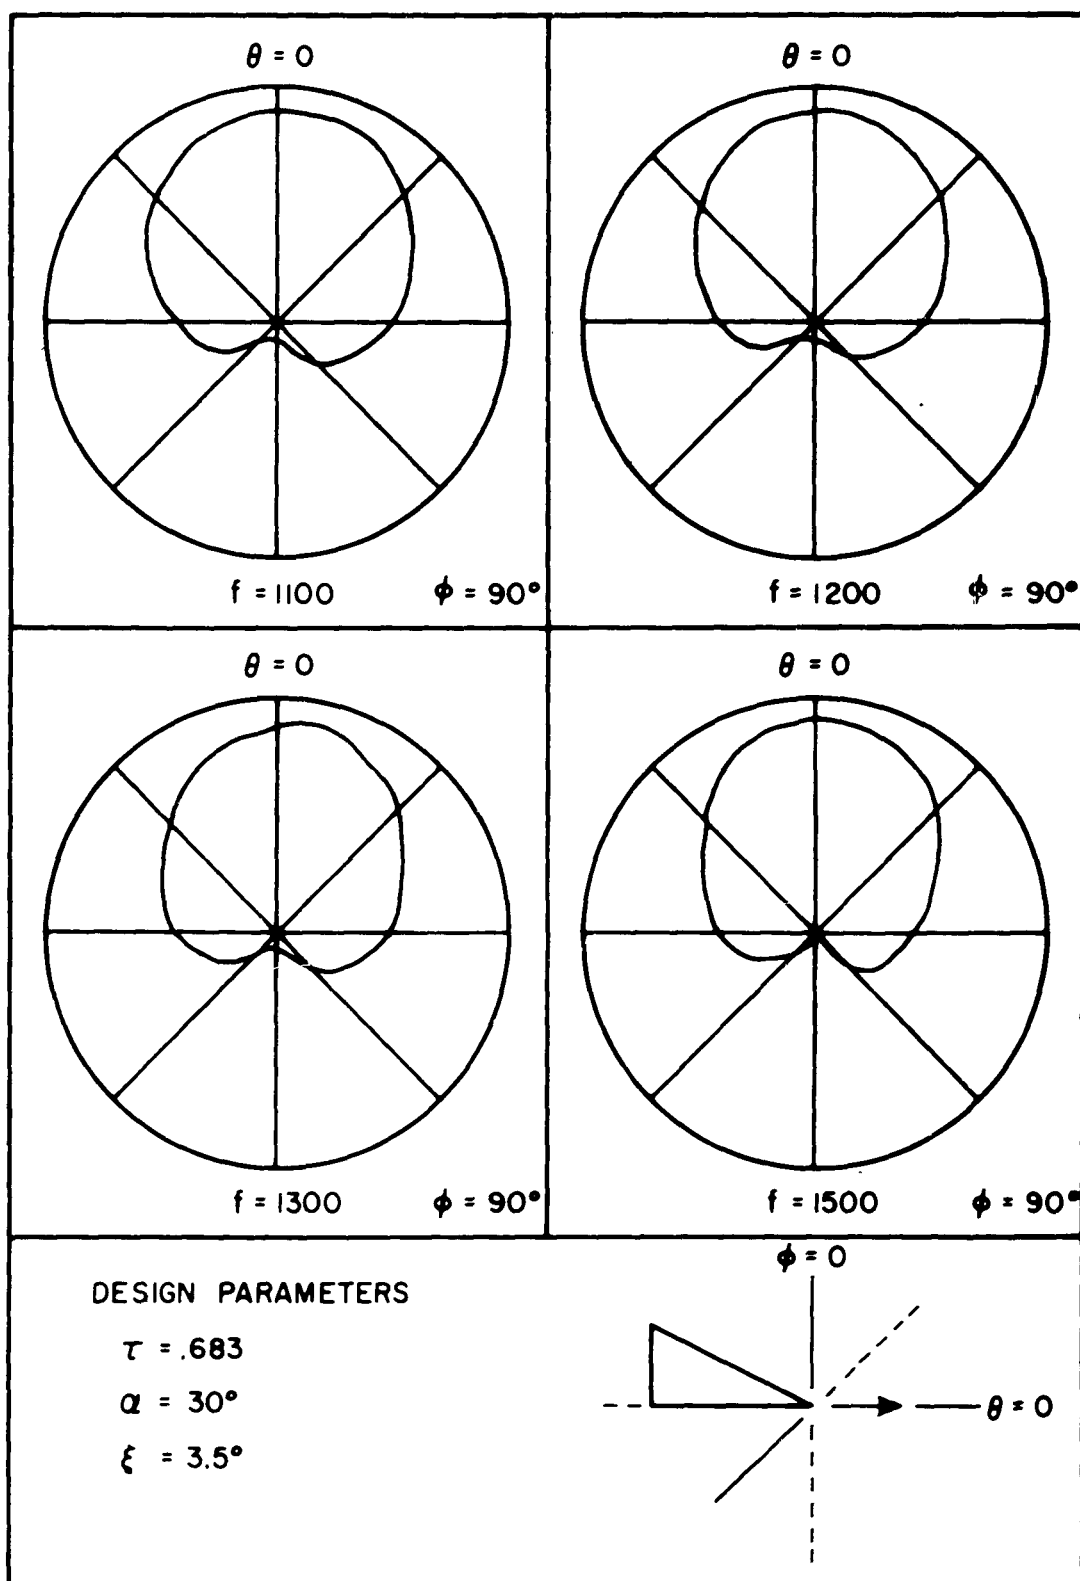


Figure 10. Measured, single element, azimuthal patterns

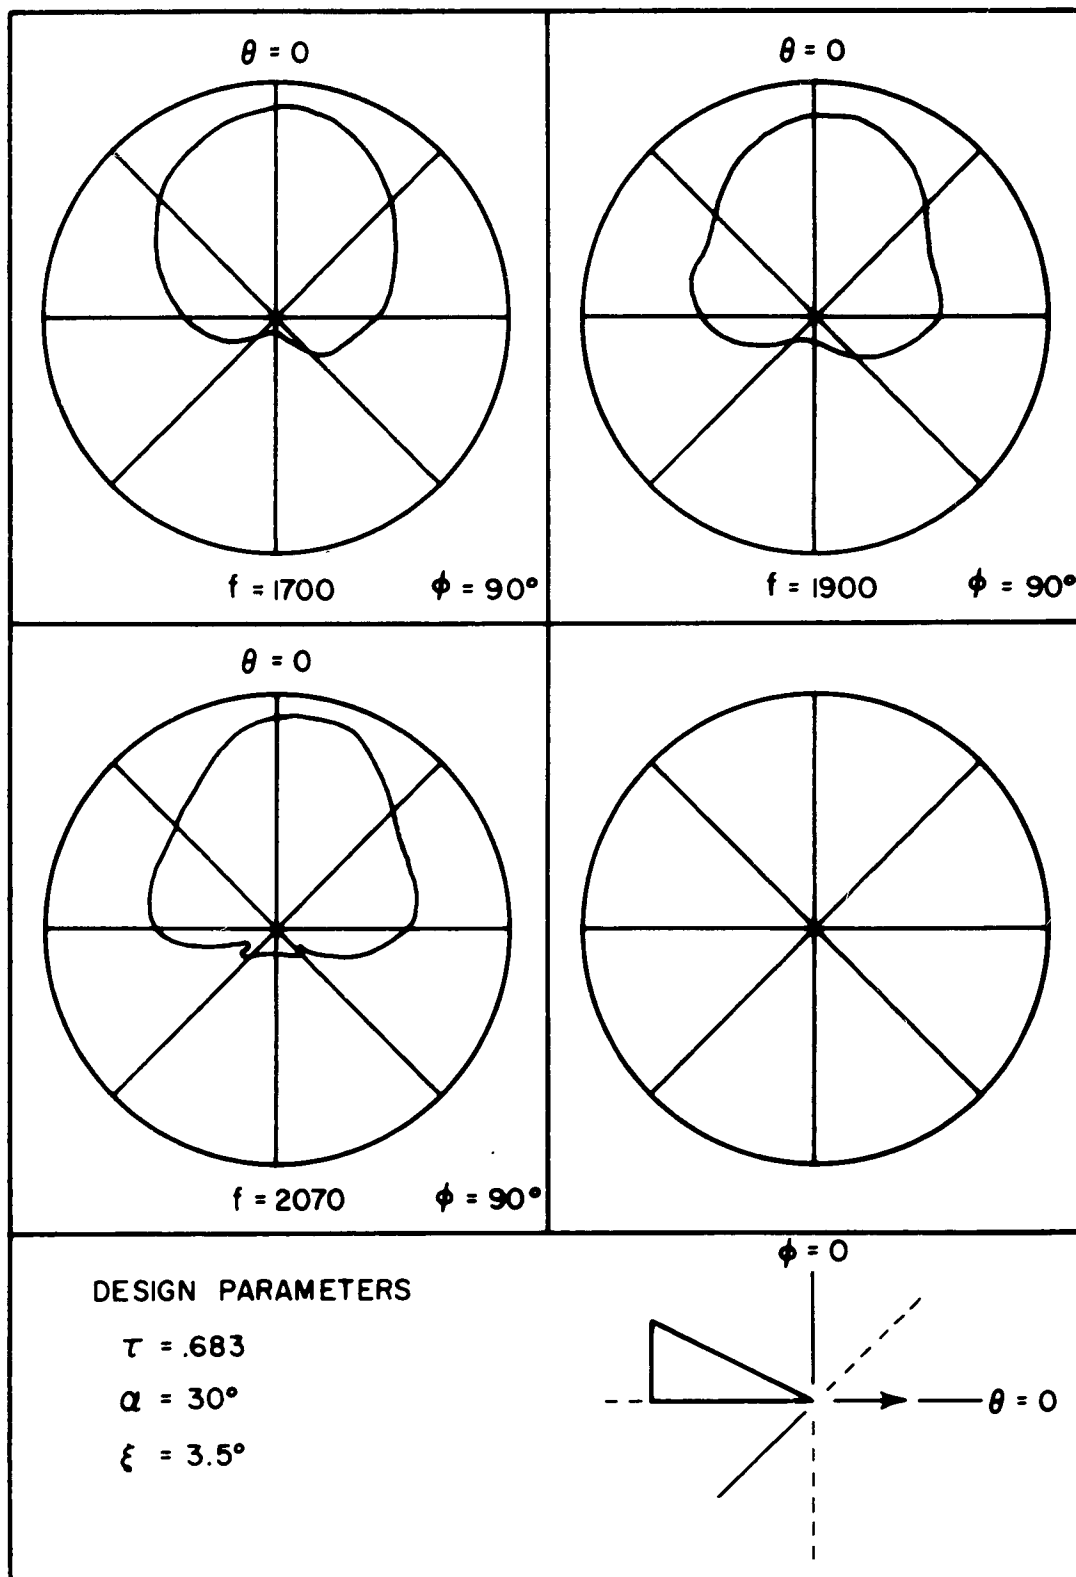


Figure 11. Measured, single element, azimuthal patterns

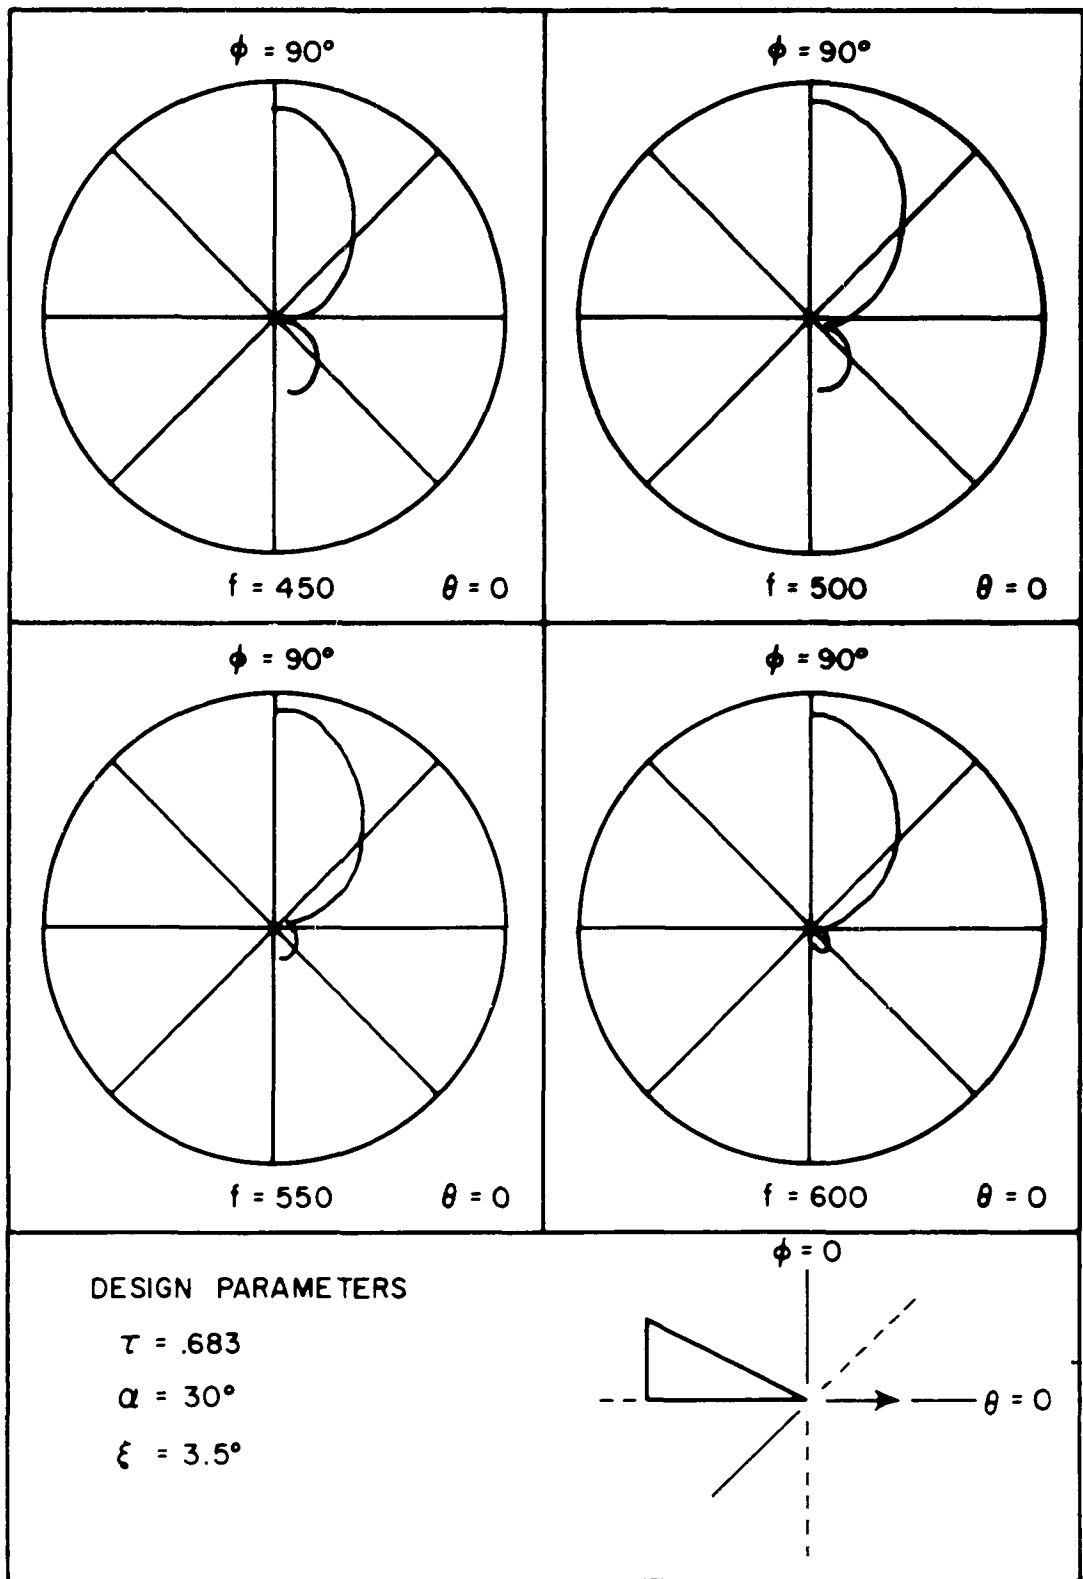


Figure 12. Measured, single element, elevation patterns



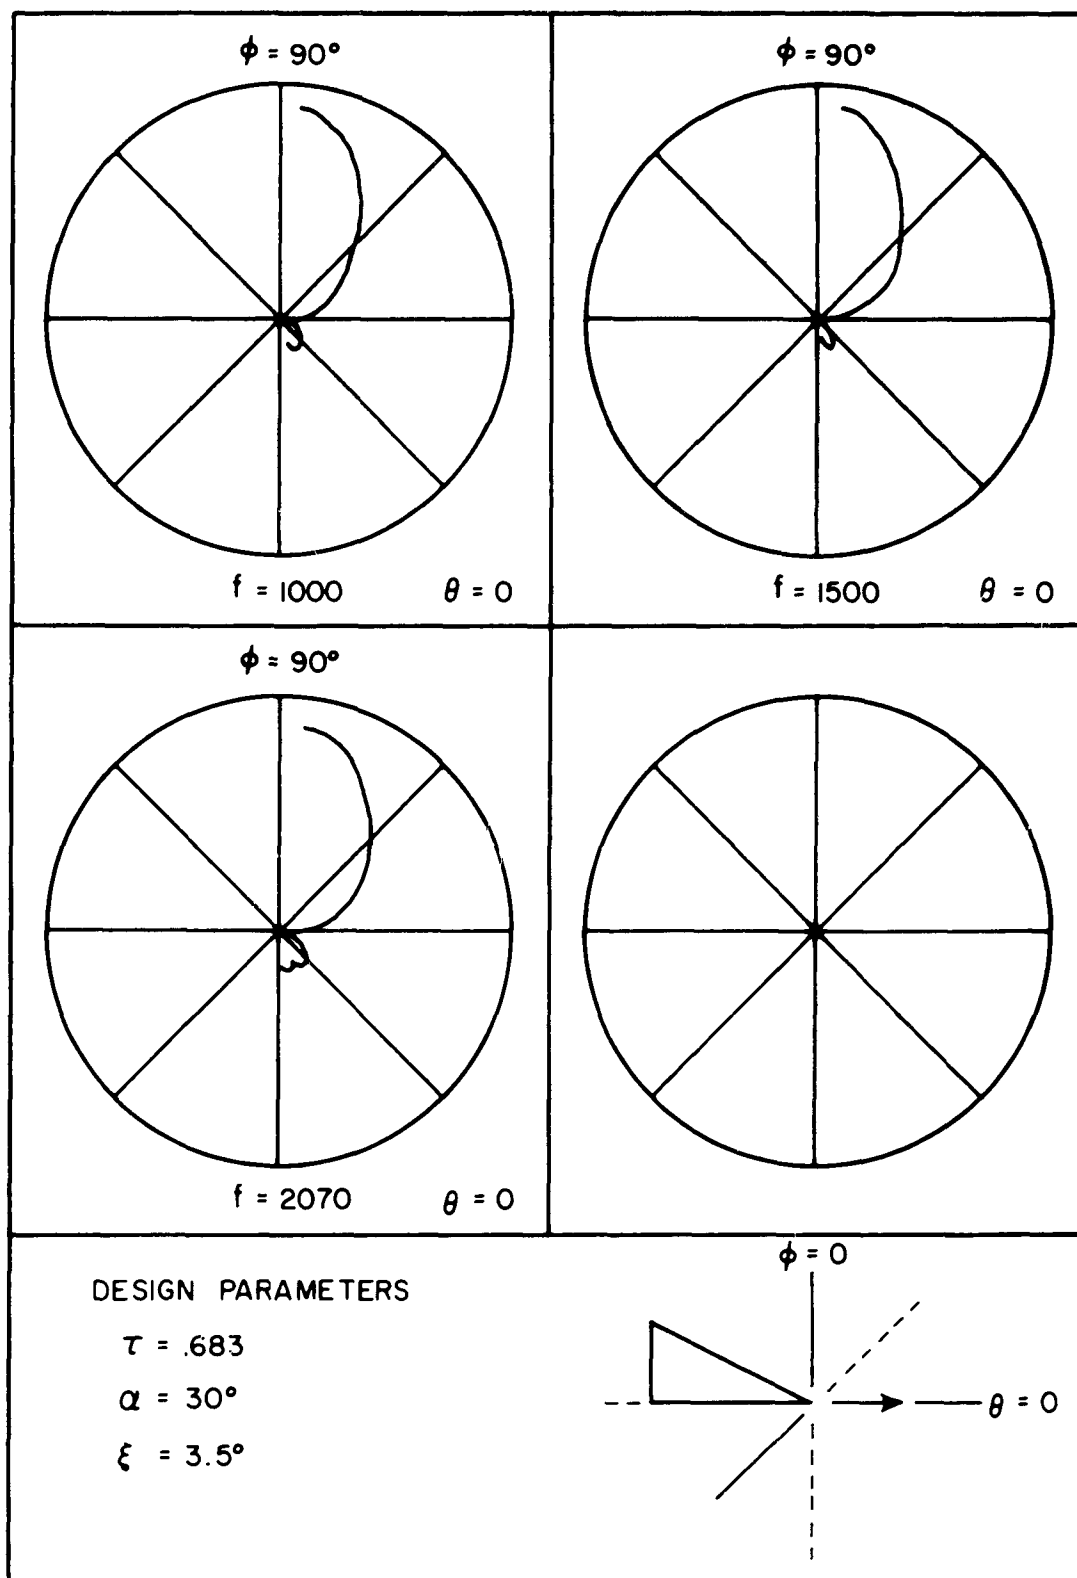


Figure 13. Measured, single element, elevation patterns

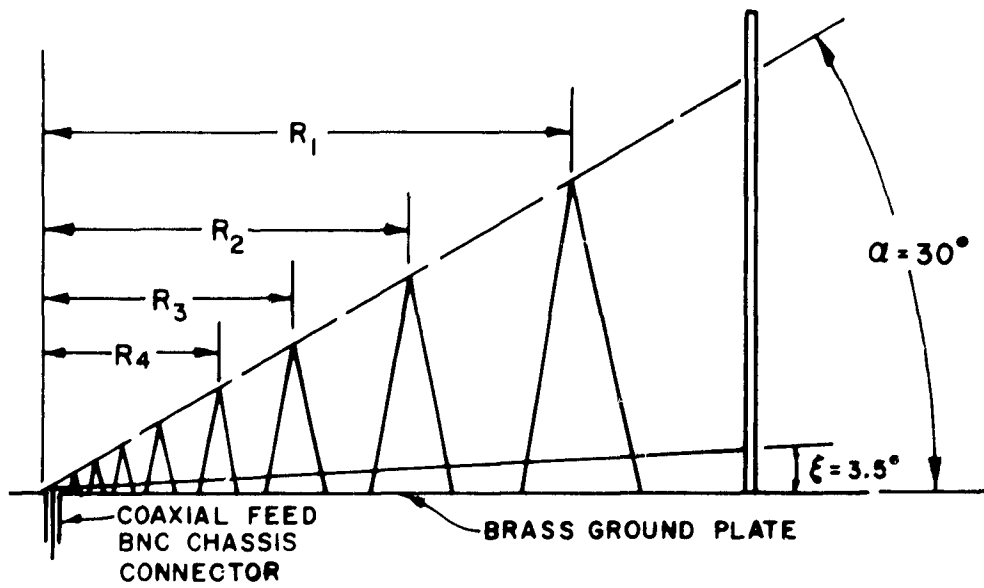

SIDE VIEW

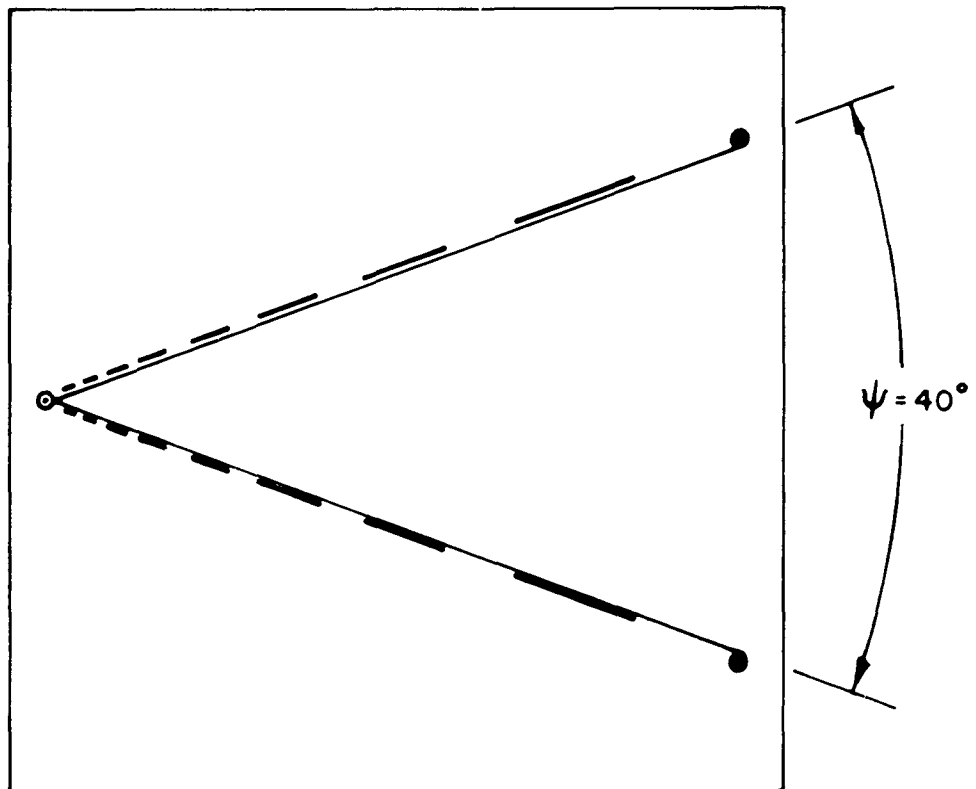

TOP VIEW

Figure 14. Two element array model

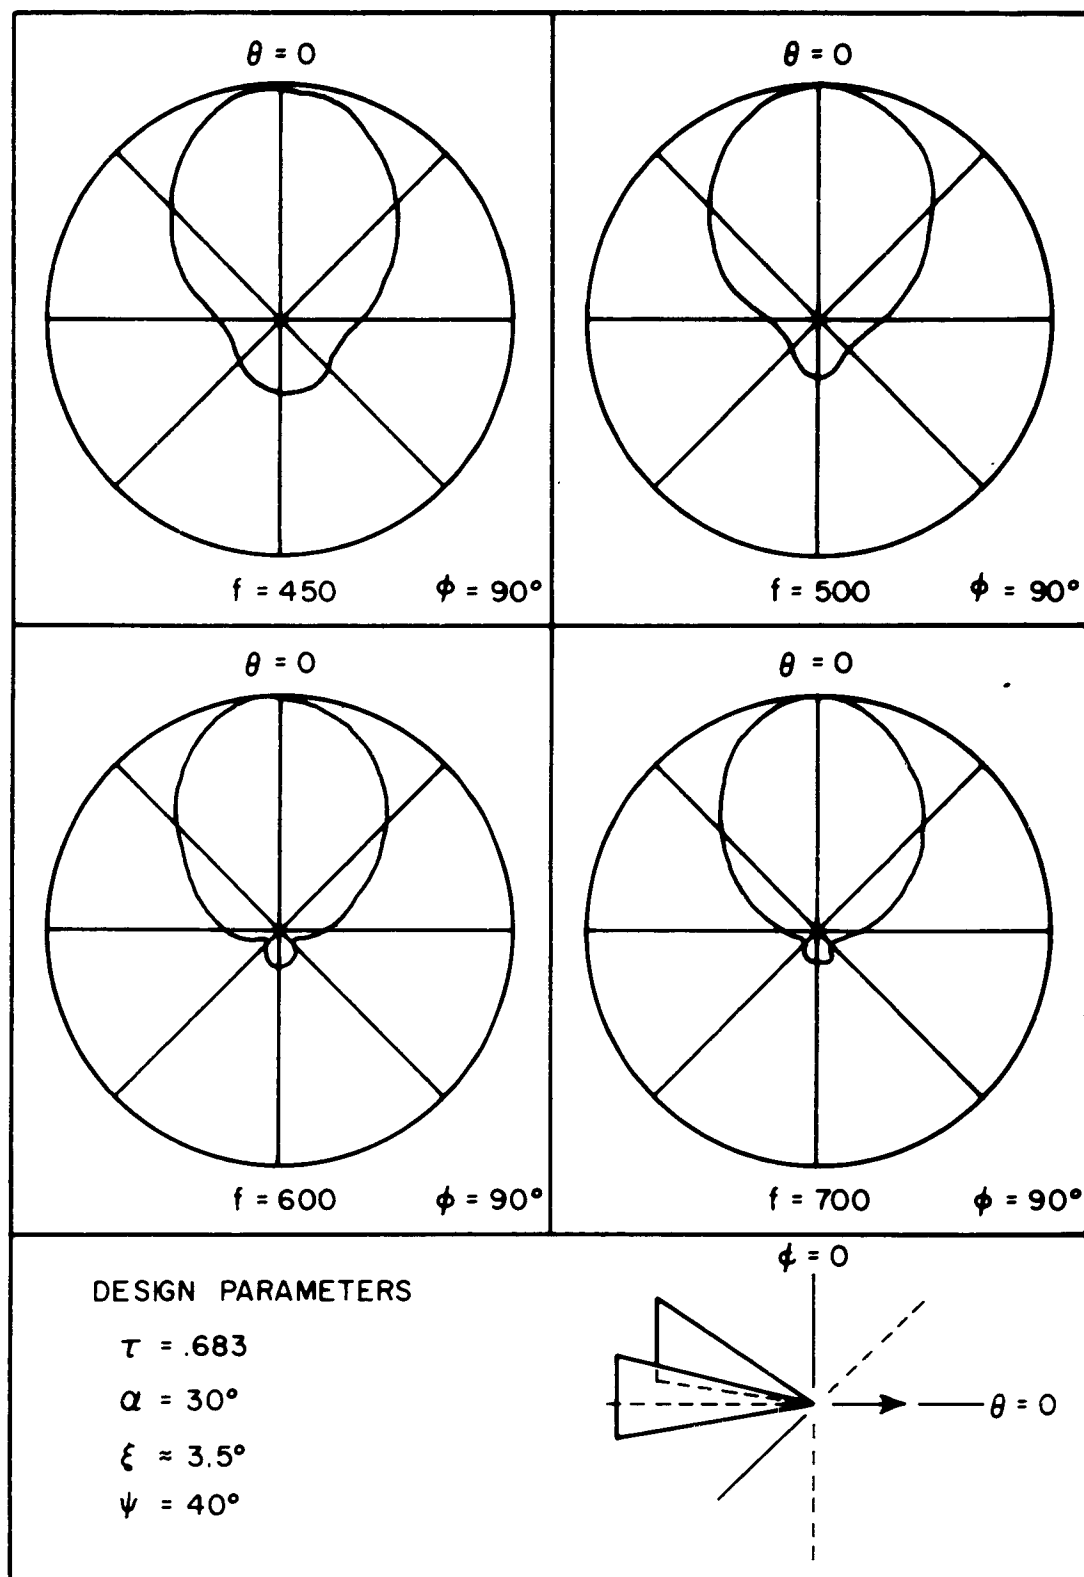


Figure 15. Measured, two element array, azimuthal patterns

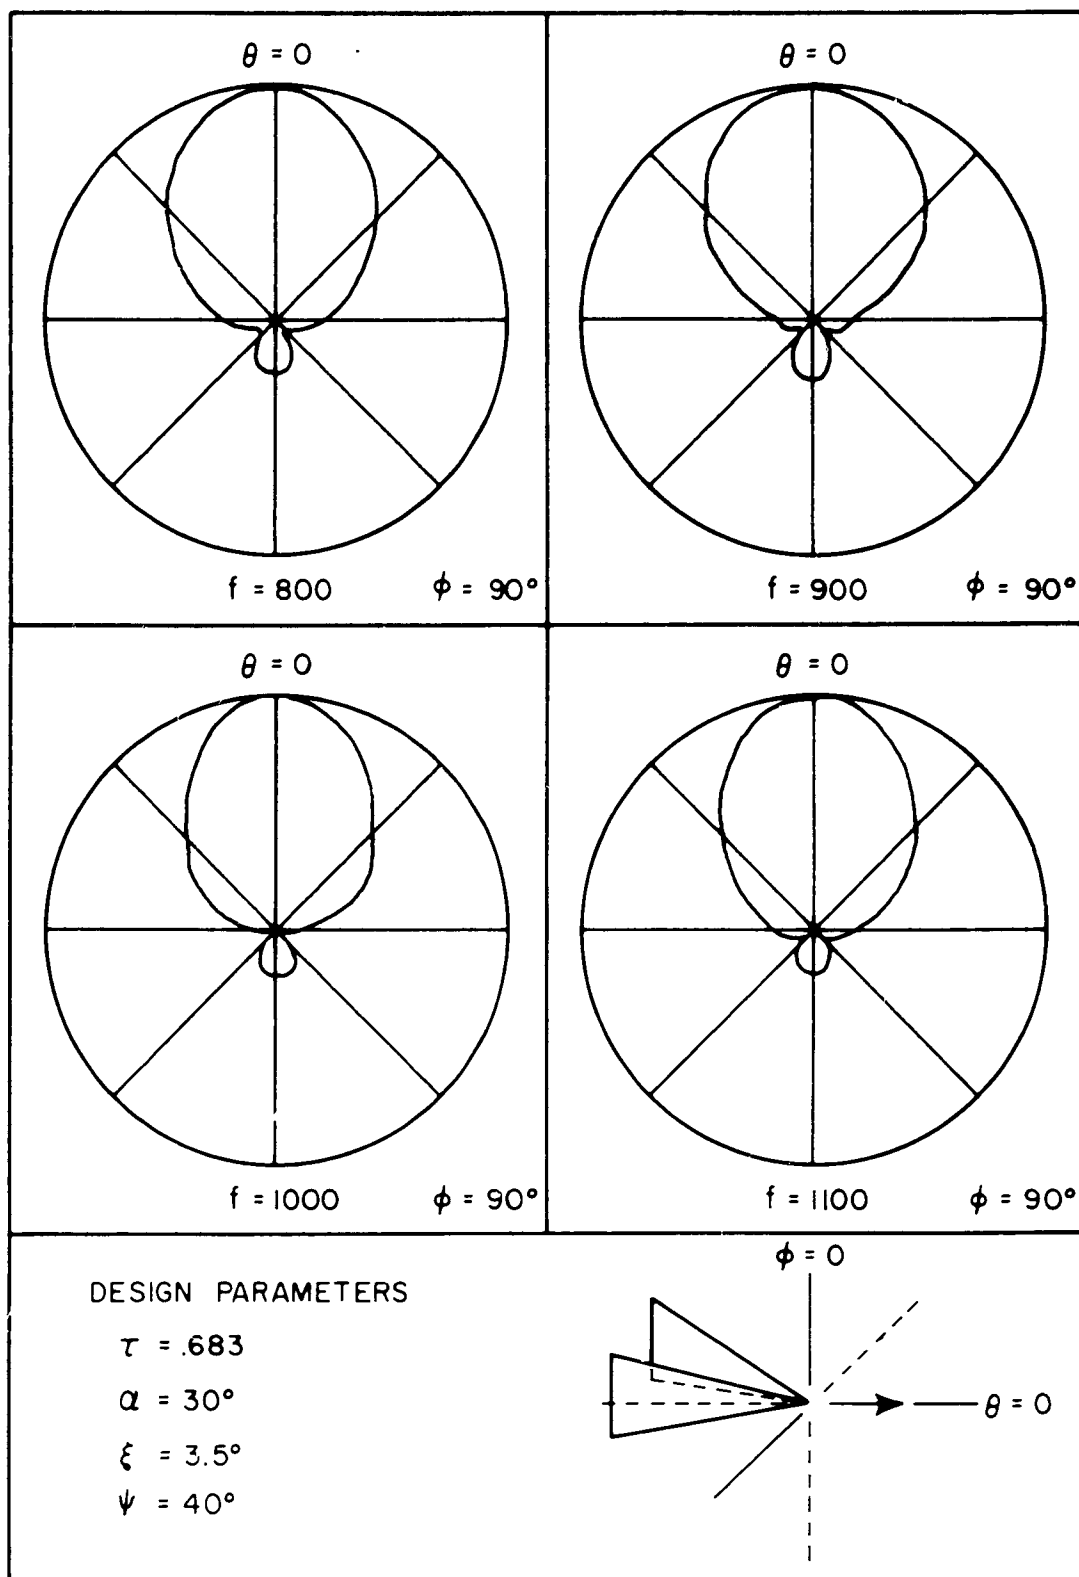


Figure 16. Measured, two element array, azimuthal patterns

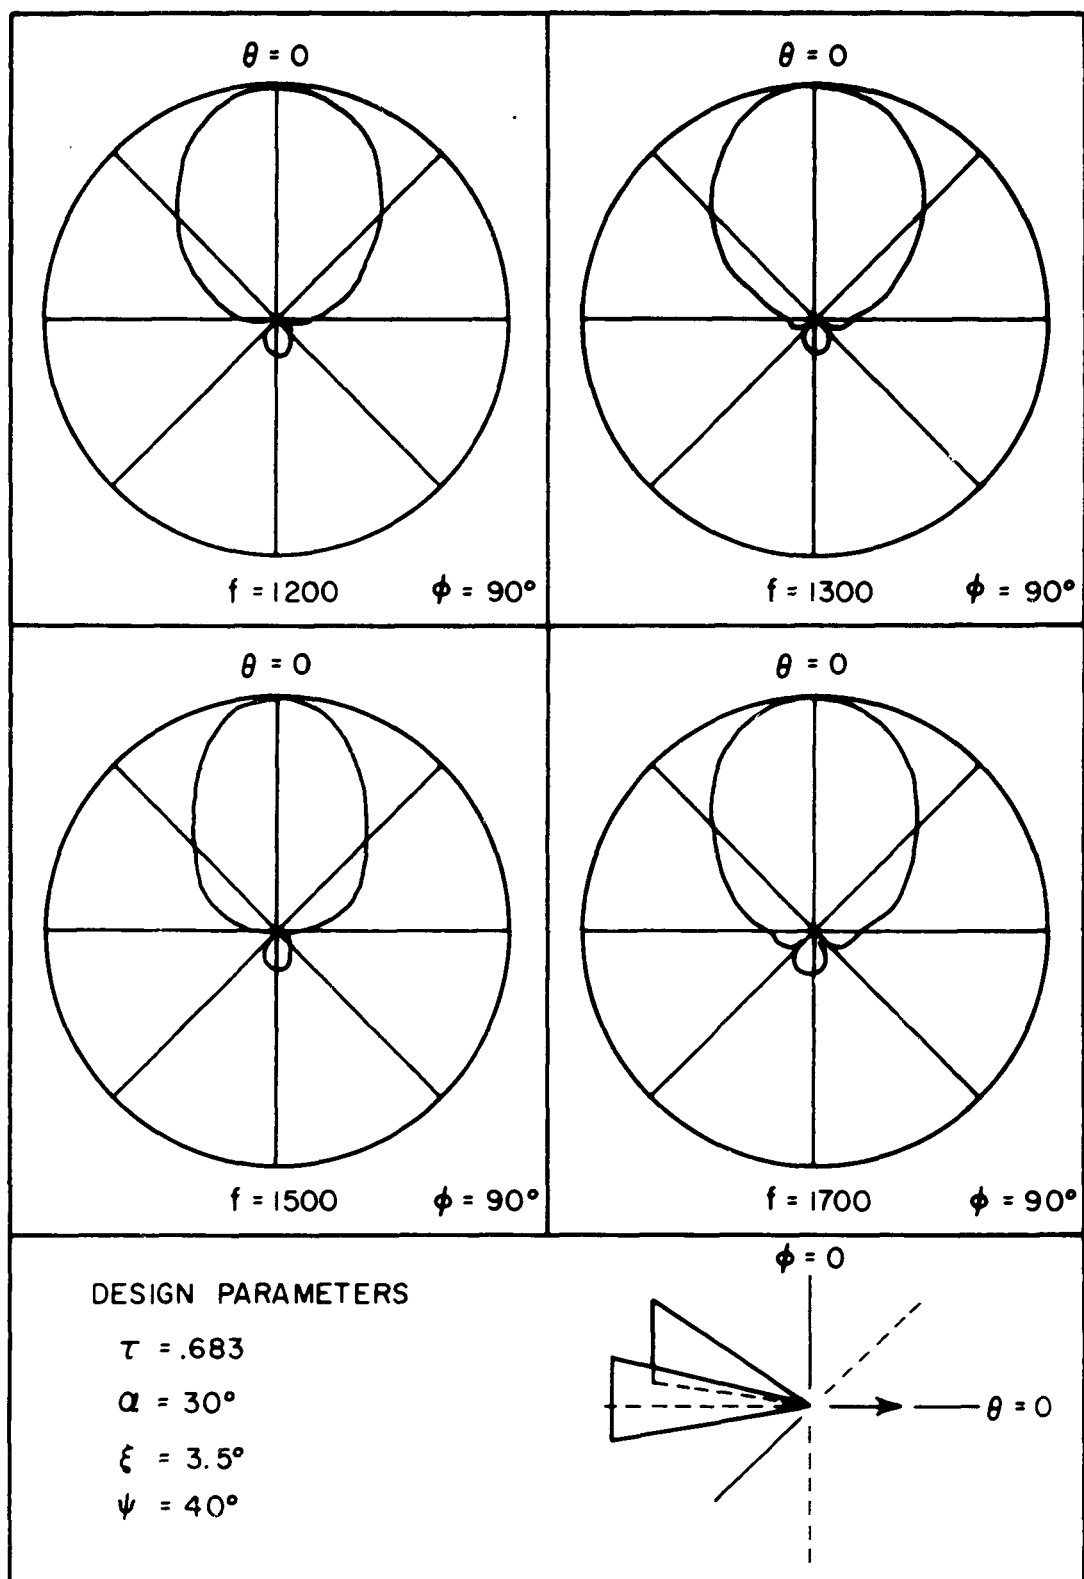


Figure 17. Measured, two element array, azimuthal patterns

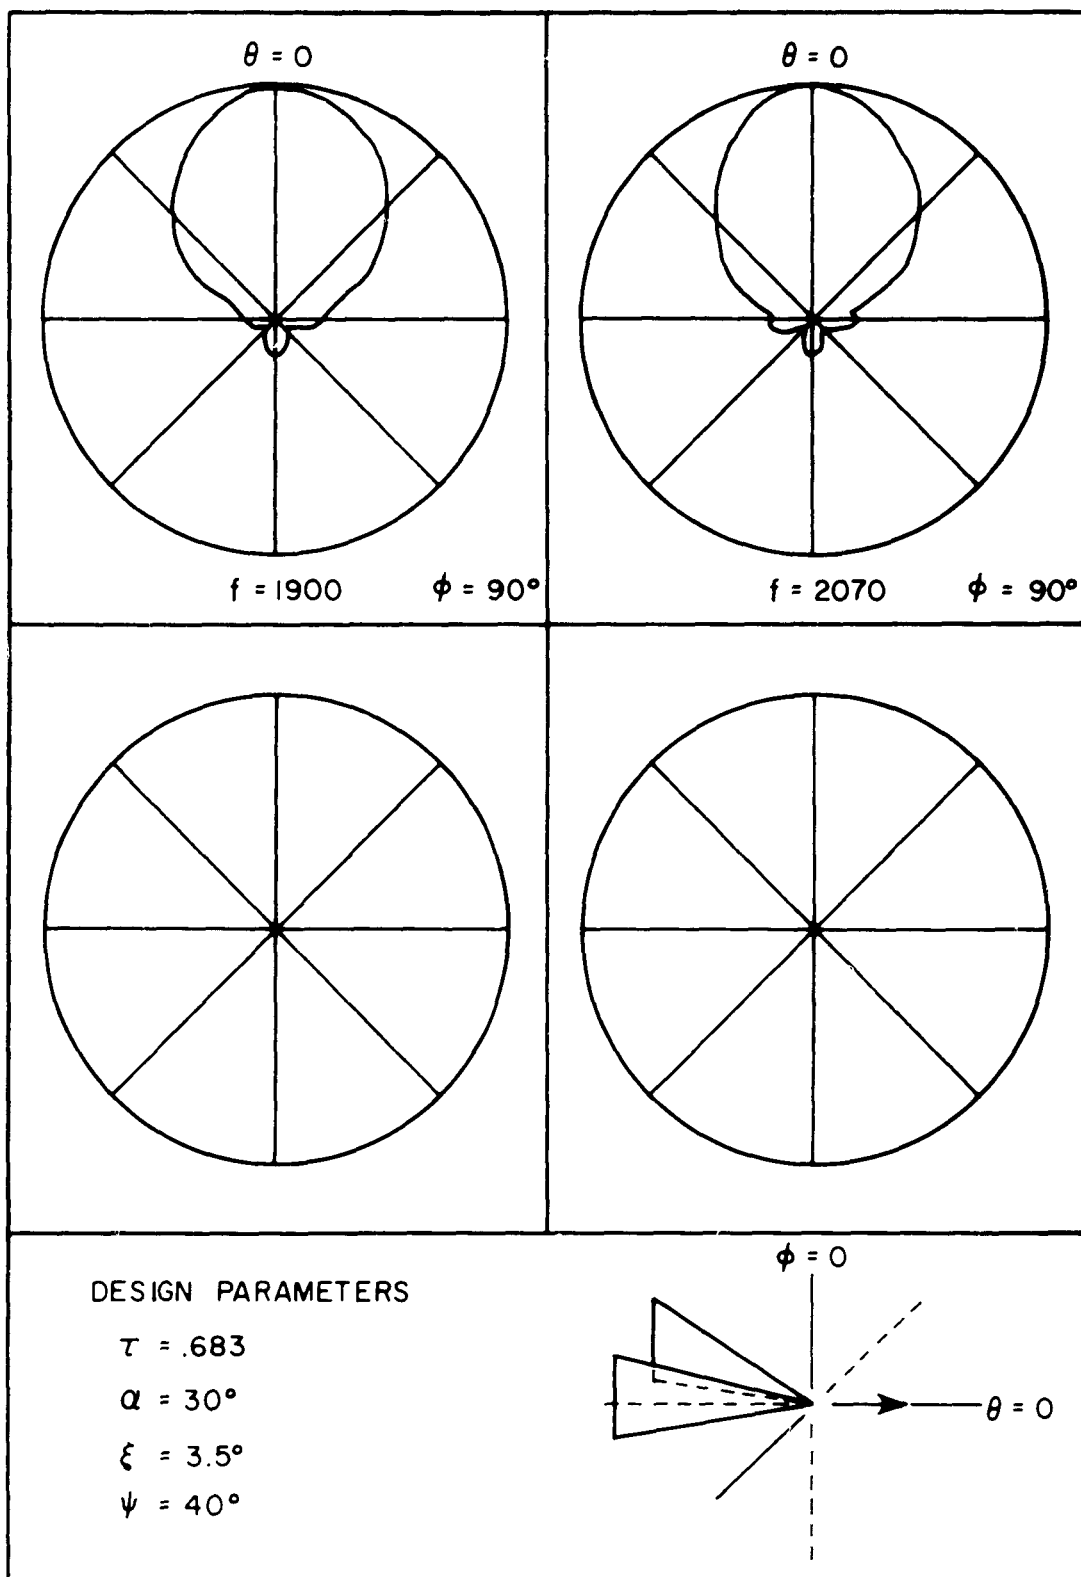


Figure 18. Measured, two element array, azimuthal patterns

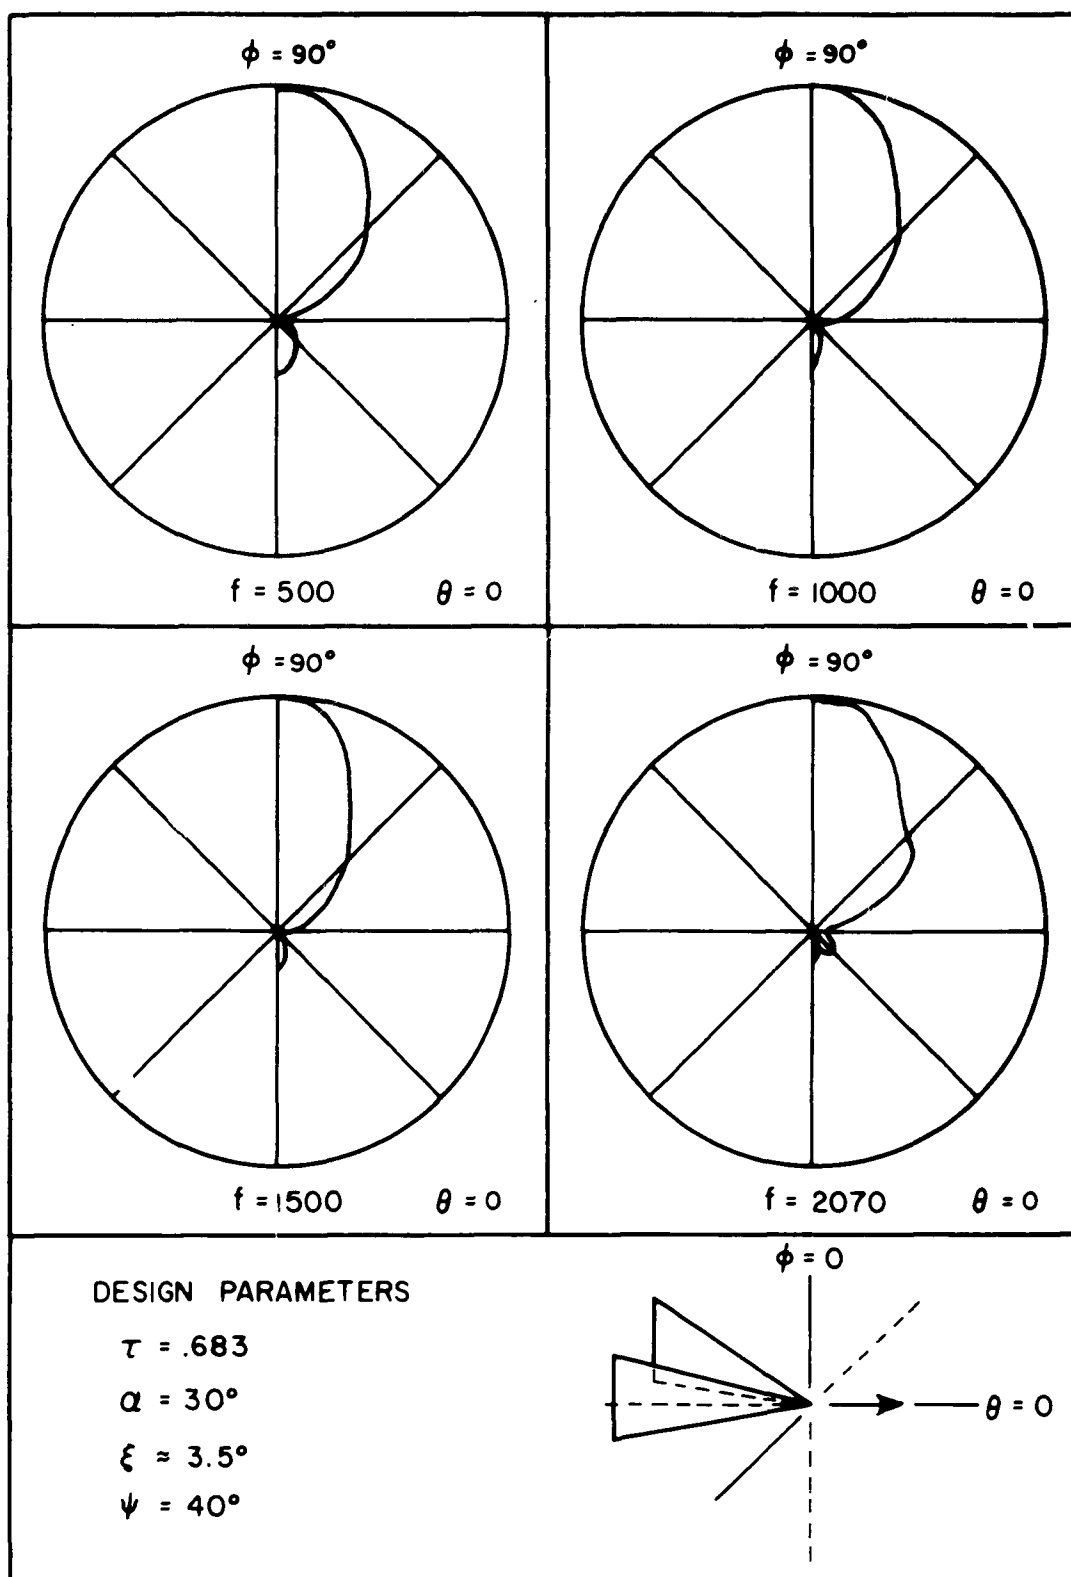


Figure 19. Measured, two element array, elevation patterns

Nonr Radiolocation

DISTRIBUTION LIST

One copy each unless otherwise indicated

Asst. Sec. of Defense for
Research and Engineering
Information Office Library Branch
Washington 25, D. C. (2 copies)

Armed Services Technical
Information Agency
Arlington Hall Station
Arlington 12, Virginia (5 copies)

Chief of Naval Research
Electronics Branch (Code 427)
Department of the Navy
Washington 25, D. C. (5 copies)

Director, Naval Research Laboratory
Technical Information Officer
Washington 25, D. C.
Code: 2000 (6 copies)

Director, Naval Research Laboratory
(Code 5400)
Washington 25, D. C. (2 copies)

Commanding Officer
ONR Branch Office Chicago
230 N. Michigan Ave.
Chicago 1, Illinois

Commanding Officer
ONR Branch Office
1030 East Green Street
Pasadena 1, California

Commanding Officer
Office of Naval Research
Navy No. 100, Box 39, F.P.O.
New York, N. Y.

Office of Technical Services
Technical Reports Section
Department of Commerce
Washington 25, D. C.

Commander
Air Force Office of
Scientific Research (SRY)
Washington 25, D. C. (2 copies)

Electronics Research Directorate
Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Massachusetts
Attn: Library

Office of Ordnance Research
Box CM, Duke Station
Durham, North Carolina

Technical Information Officer
Signal Corps Engineering Laboratory
Fort Monmouth, New Jersey (2 copies)

Director
National Science Foundation
Washington 25, D. C.

Director, Nat. Bureau of Standards
Department of Commerce
Washington 25, D. C.

Chief, Bureau of Ships
Department of the Navy
Washington 25, D. C.

Chief, Bureau of Weapons
Department of the Navy
Washington 25, D. C.

Commander
Naval Air Development and
Material Center
Johnsville, Pennsylvania

Librarian
U. S. Naval Electronics Laboratory
San Diego 52, California

Commanding Officer and Director
U. S. Naval Underwater Sound Lab.
Fort Trumbell, New London, Conn.

Librarian
U. S. Navy Post Graduate School
Monterey, California

Commander
U. S. Naval Air Missile Test Center
Pt. Mugu, California

Director
U. S. Naval Observatory
Washington 25, D. C.

Research Laboratory for Electronics
Massachusetts Inst. of Technology
Cambridge 39, Massachusetts

Department of Physics
Columbia University
New York 27, N. Y.

Dr. E. L. Ginzton
Microwave Research Laboratory
Stanford University
Stanford, California

Dr. Samuel Silver
Electronics Research Laboratory
University of California
Berkeley 4, California

Dr. Nathan Marcuvitz
Polytechnic Institute of Brooklyn
55 Johnson Street
Brooklyn 1, New York

Commanding Officer
ONR Branch Office
346 Broadway
New York 13, N. Y.

National Security Agency
Division of Physical Sciences
Ft. George G. Meade, Maryland

Commanding Officer
ONR Branch Office
495 Summer Street
Boston 10, Massachusetts

Library
Boulder Laboratories
National Bureau of Standards
Boulder, Colorado

Sperry Phoenix Company
Attn: Charles H. Ferguson
Technical Librarian
P.O. Box 2529
21111 North 19th Avenue
Phoenix, Arizona

Institute for Defense Analyses
Communications Research Division
Von Neumann Hall
Princeton, New Jersey

Joyce E. Lunde
Reference Librarian
The Dodge Library
Northeastern University
Boston 15, Massachusetts

Librarian-in-Charge
The University of Auckland
School of Engineering
Ardmore College Post Office
New Zealand